



0120A04006001M

Power Divider

DC-6GHz 4Way SMA 0.5W Resistive Power Divider

Features

- ✓ Low Insertion Loss & VSWR
- ✓ High Reliability

Electrical Specifications

Frequency	DC-6GHz
Insertion Loss (Above Theoretical Loss:12.0dB)	12±1.5dB(Max.)
VSWR	1.3:1(Max.)
Phase Unbalance	±6°(Max.)
Amplitude Unbalance	±0.5dB(Max.)
Power:	0.5W (Avg.)
Impedance	50Ohm
Connection	SMA Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Outling Drawing (Unit:mm) Tolerance:±0.3

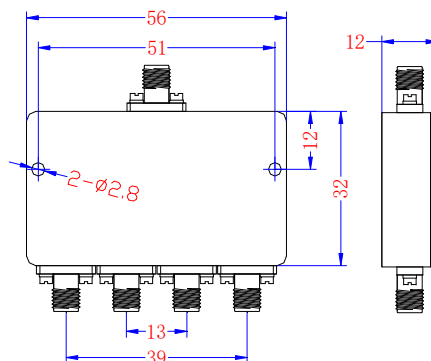

All Specification Changed Without Notification.