





0120A162080010

Power Divider

2-8GHz 16Way SMA Fwd30W/Rev.
2W Isolated Power Divider


Features

- ✓ Use as Divider or Combiner
- ✓ Low Insertion Loss & VSWR
- ✓ High Isolation




Test Report

Insertion Loss/VSWR/Phase/Amplitude

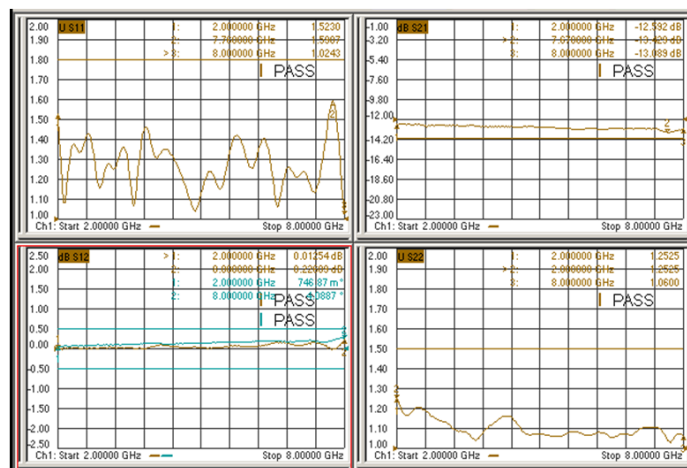

Isolation

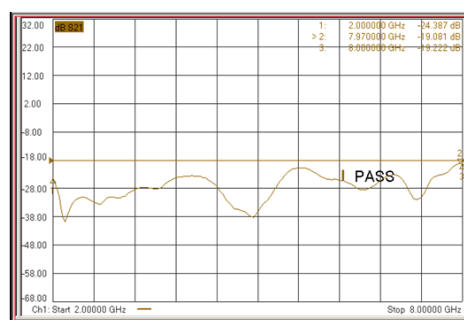

Electrical Specifications

Frequency	2-8GHz
Insertion Loss (Above Theoretical Loss:12.0dB)	2.2dB(Max.)
VSWR(Input)	1.8:1(Max.)
VSWR(Output)	1.5:1(Max.)
Isolation	18dB(Min.)
Phase Unbalance	±8°(Max.)
Amplitude Unbalance	±0.5dB(Max.)
Power:Forward:	30W (Avg.)
Reverse	2W(Avg.)
Impedance	50Ohm
Connection	SMA Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~75°C
-----------------------	------------

Outling Drawing (Unit:mm) Tolerance:±0.3

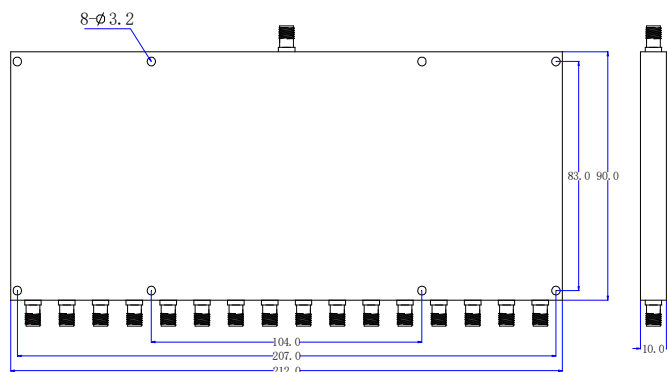

All Specification Changed Without Notification.