


Power Divider

Features



Test Report

Electrical Specifications






Frequency	1-8GHz
Insertion Loss (Above Theoretical Loss 15.05dB)	2.5dB(Typ.) 4.6dB(Max.)
VSWR	1.5:1(Typ.) 1.95:1(Max.)
Isolation	20dB(Typ.) 17dB(Min.)
Phase Unbalance	±12°(Max.)
Amplitude Unbalance	±1.0dB(Max.)
Power:Forward:	25W (Avg.)
Impedance	50Ohm
Connection	SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-35°C~80°C
-----------------------	------------

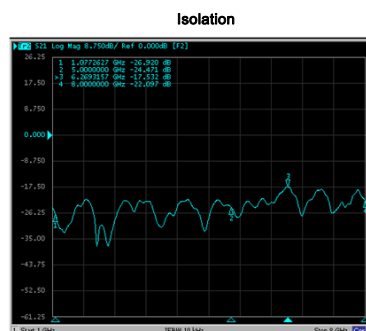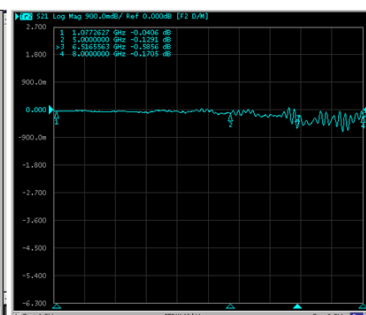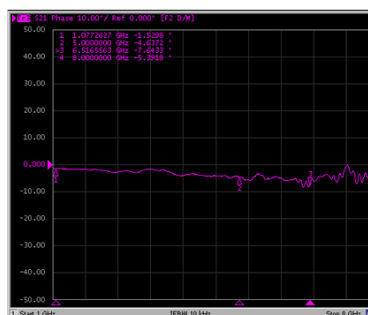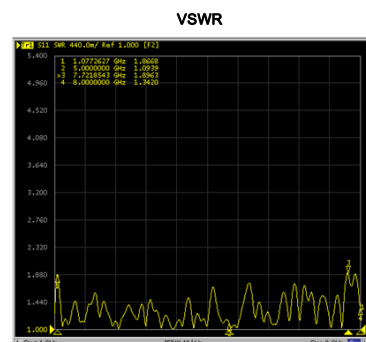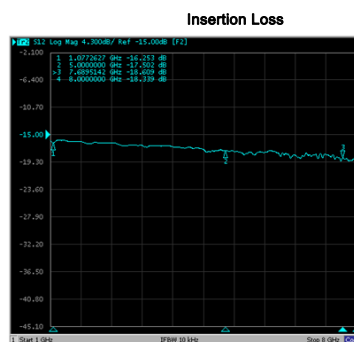

Outling Drawing (Unit:mm)

