

Features:

Low Insertion Loss & VSWR
Flat Frequency response
High Isolation




Unit:mm

Specifications:

Electrical:

Frequency:0.8-2.5GHz
Insertion Loss:0.2dB(Max.)
VSWR:1.25:1(Max.)
Split Loss: 2Way :3.0dB
 3Way: 4.8dB
 4Way: 6.0dB
Amplitude Unbalance:±0.5dB(Max.)
Power:200W(Max.)
Intermod Distortion:-130dBc@43dBm
Impedance: 50Ohm
Connection: N
Environmental:
Temperature: -35°C~75°C

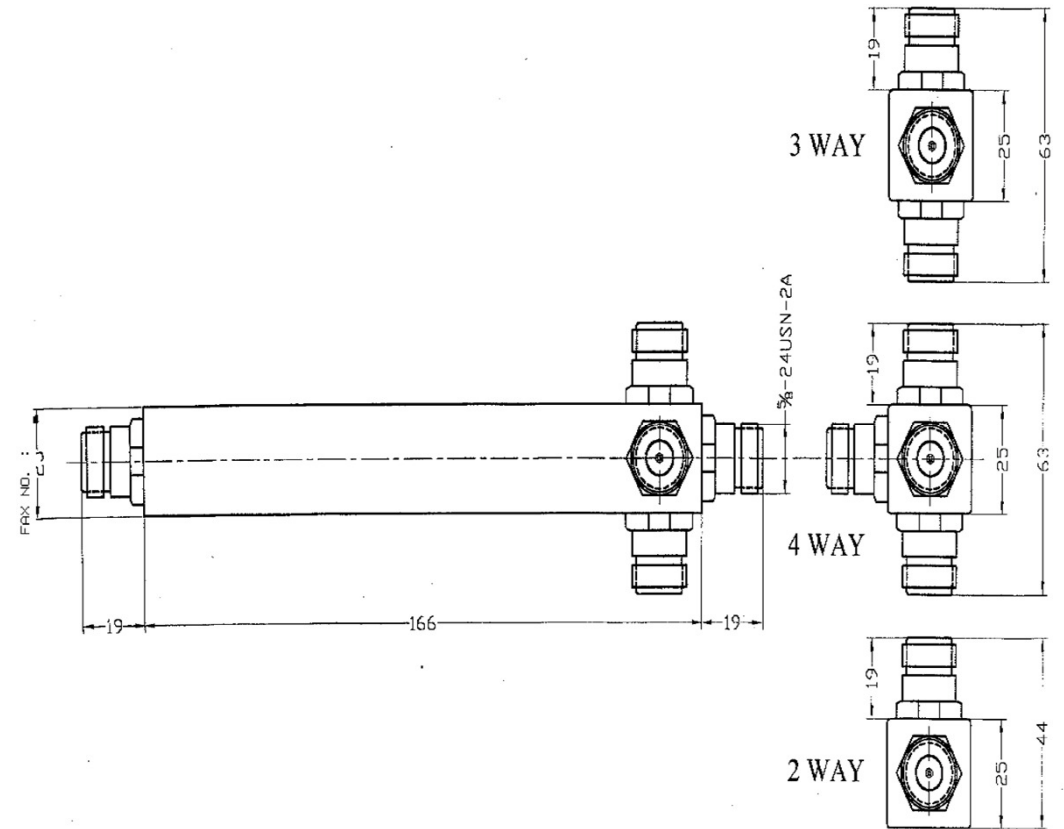

XX place 02 for 2way ,03 for 3way,04 for 4way

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

04/10/09'

04/10/09'

04/10/09'



Woken Technology Inc.

CODE

DWG TITLE

0.8-2.5GHz N 200W

Power Divider

SIZE

A4

DWG NO.

0120NXX082501Y

REV

A