



0130A18061002P

Circulator

0.69-1GHz 20dB A:100W I/L0.5dB
VSWR:1.25 SMA CW Circulator

Features

- ✓ Optional removable connectors for assembly integration
- ✓ Low VSWR
- ✓ High Isolation



Electrical Specifications

Frequency	690-1000MHz
Isolation	20dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:100W(CW)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	0~+50°C
-----------------------	---------

Outling Drawing (Unit:mm)

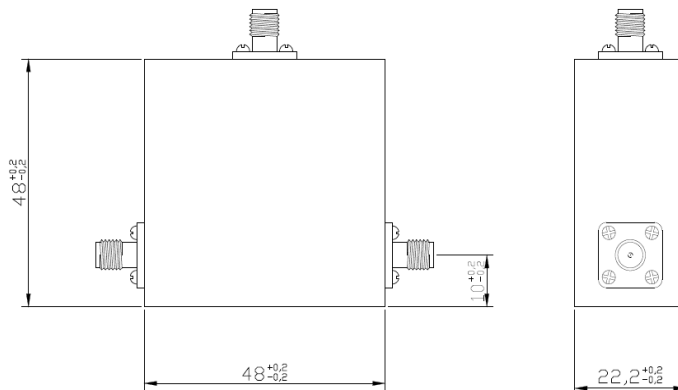

Test Report

