

4

3

2

1

Unit:mm

Features:

Small Size

Optional removable connectors for Assembly integration

Specifications:**Electrical:**

Frequency:1.7-2.2GHz

Isolation:18dB(Min.)

VSWR:1.25:1(Max.)

Insertion Loss:0.6dB(Max.)

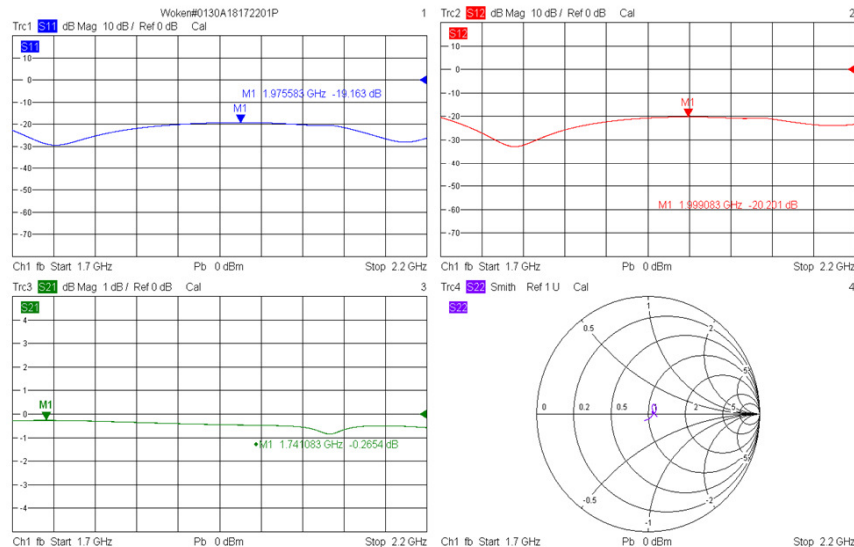
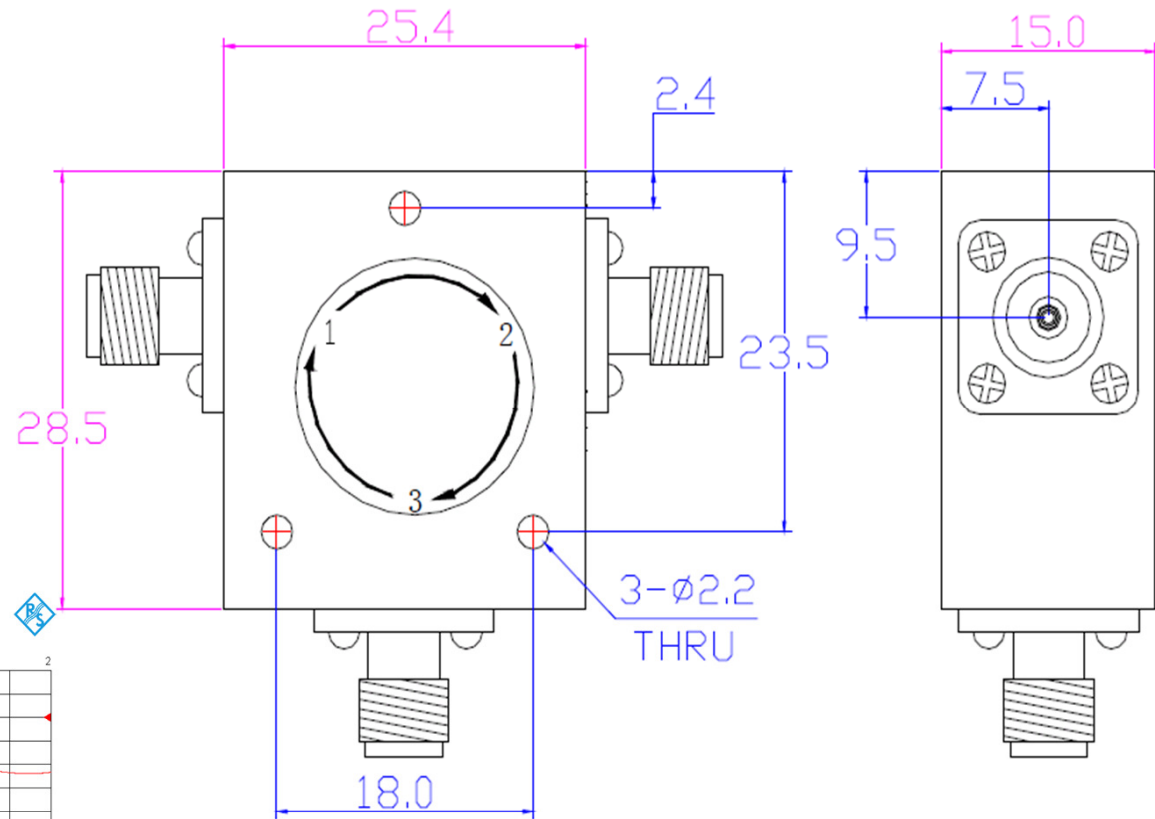
Power:Forward: 100W;Reverse:100W

Impedance: 50Ohm

Connection: SMA Female

Environmental:

Temperature:-20°C~65°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


X ±0.38 .XX ±0.15

.X ±0.25 .XX X ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



Woken Technology Inc.

CODE

DWG TITLE

1.7-2.2GHz 18dB A:100W I/L0.6dB

SIZE

VSWR:1.25 SMA CW Circulator

DWG NO.

0130A18172201P

REV

A

4

3

2

1