



0130A18300601P

Circulator

**3-6GHz 18dB 100W I/L0.5dB
VSWR:1.3:1 SMA CW Circulator**

Features

- ✓ Optional removable connectors for assembly integration
- ✓ Low VSWR
- ✓ High Isolation

Electrical Specifications

Frequency	3-6GHz
Isolation	18dB(Min.)
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Avg.:Forward:100W Peak:1KW(5 μsec Pulse, 10% Duty Cycle)
Connection	SMA Female
Direction	Clockwise




Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Outling Drawing (Unit:mm)

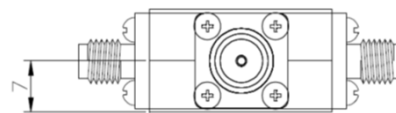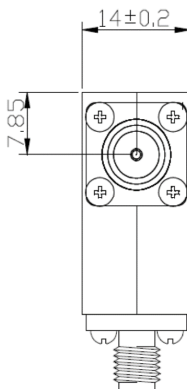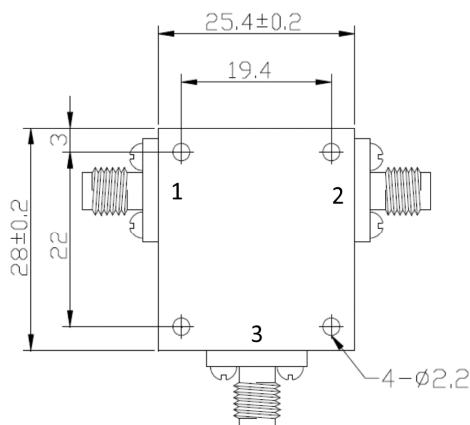

Test Report

