




0130A18408001P

Circulator

4-8GHz 18dB 100W I/L0.6dB
VSWR:1.3:1 SMA CW Circulator

Features

- High Repeatability
- Low VSWR
- High Isolation

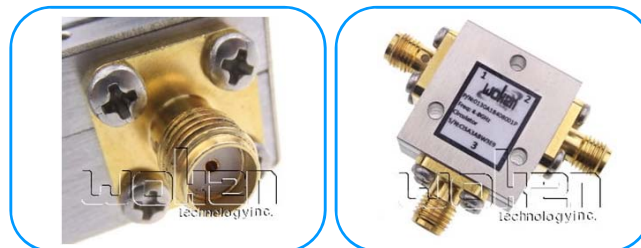

Electrical Specifications

Frequency	4-8GHz
Isolation	18dB(Min.)
VSWR	1.3:1(Max.)
Insertion Loss	0.6dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	0~+60°C
-----------------------	---------

Test Report

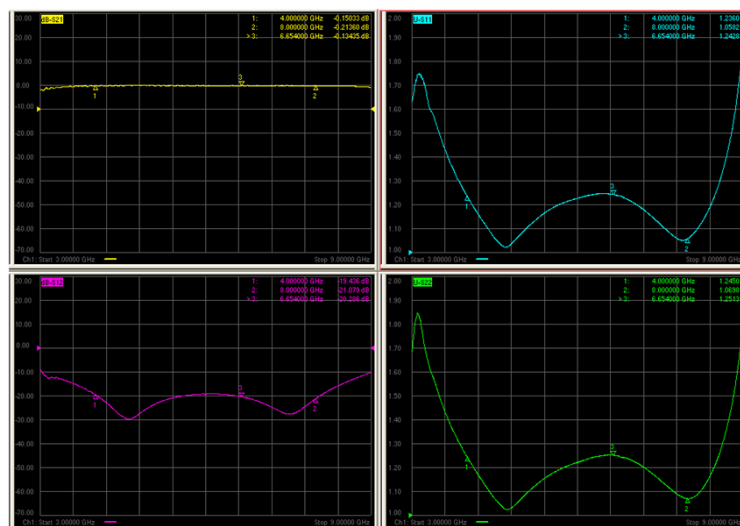

Outling Drawing (Unit:mm)

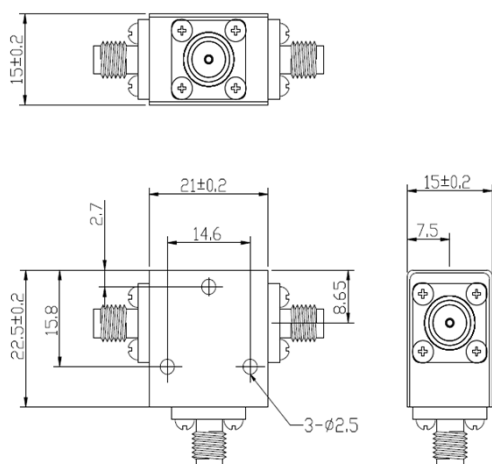

All Specification Changed Without Notification.