



0130A18A01501P

Circulator

10–15GHz 18dB A:60W I/L0.6dB
VSWR:1.3:1 SMA CW Circulator

Features

- ✓ Optional removable connectors for assembly integration
- ✓ Low VSWR
- ✓ High Isolation

Electrical Specifications

Frequency	10-15GHz
Isolation	18dB(Min.)
VSWR	1.3:1(Max.)
Insertion Loss	0.6dB(Max.)
Impedance	50Ohm
Power	Forward:60W(Avg.) Reverse:10W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-10~+70°C
-----------------------	-----------

Outling Drawing (Unit:mm)

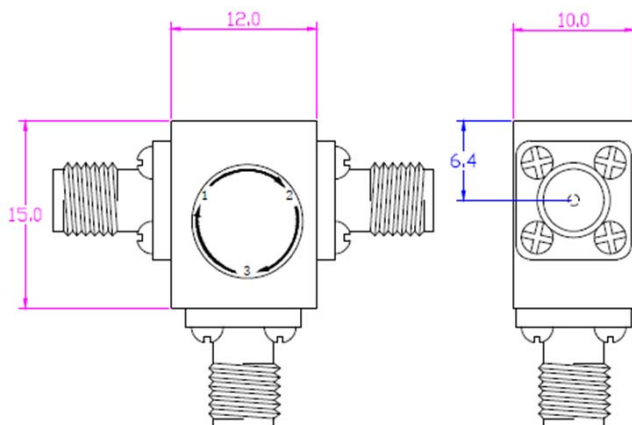

Test Report

