



0130A23230201P

Circulator


2.3-2.6GHz 23dB A:100WI/L0.4dB
VSWR:1.2 SMA CW Circulator

Features

- ✓ Optional removable connectors for assembly integration
- ✓ Low VSWR
- ✓ High Isolation



Test Report

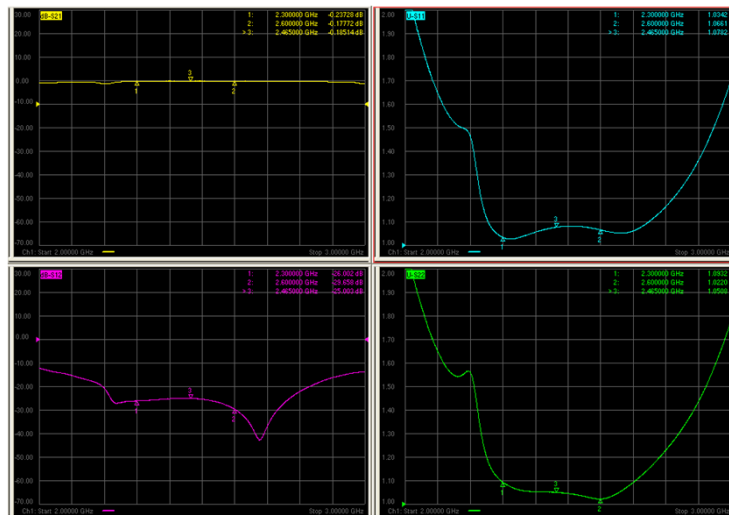

Electrical Specifications

Frequency	2.3-2.6GHz
Isolation	23dB(Min.)
VSWR	1.2:1(Max.)
Insertion Loss	0.4dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.)
Connection	SMA Female
Direction	Clockwise



Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Outling Drawing (Unit:mm)

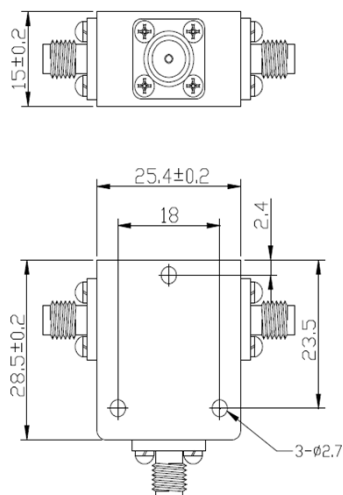

All Specification Changed Without Notification.