

Features:

Small Size

Optional removable connectors for assembly integration

Specifications:

Electrical:

Frequency:2.5-2.7GHz

Isolation:23dB(Min.)

VSWR:1.20:1(Max.)

Insertion Loss:0.3dB(Max.)

Average Power:Fwd.100W Rev.100W

Impedance: 50Ohm




Connection: N Female

Direction:Clockwise

Environmental:

Temperature:-30°C~70°C

Unit:mm

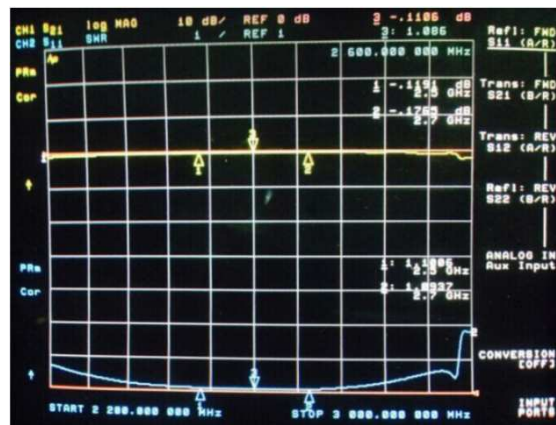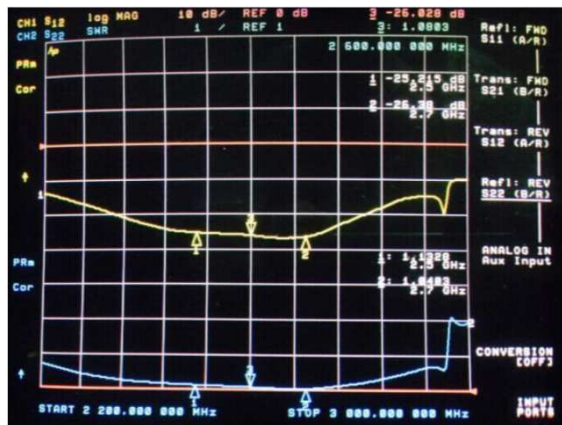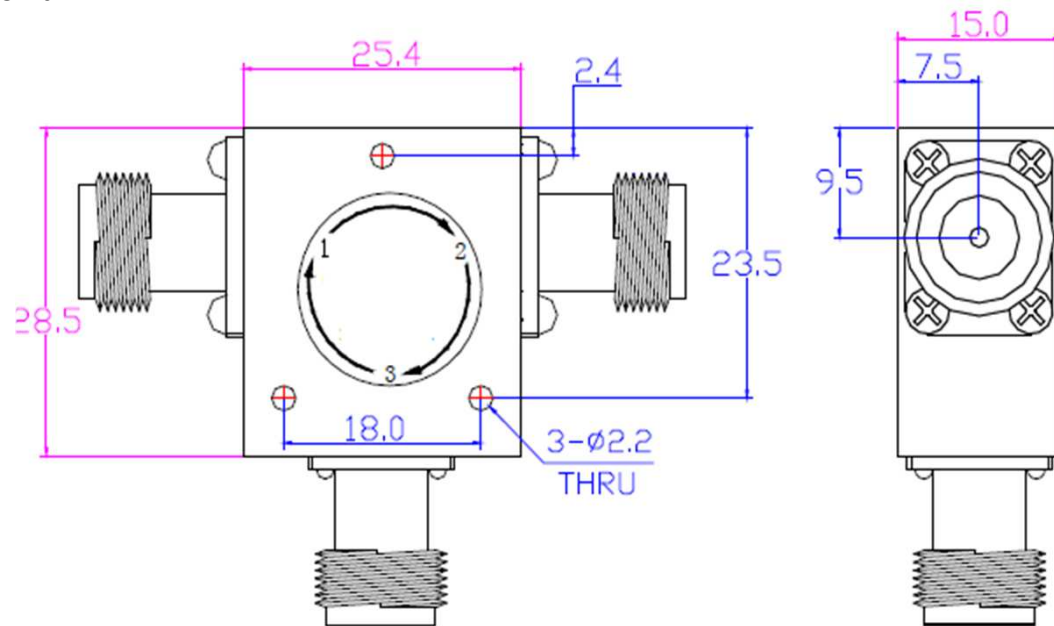

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

ENGR Jack

APVD James

04/01/11'

04/01/11'

04/01/11'



Woken Technology Inc.

CODE

DWG TITLE

2.5-2.7GHz 23dB A:100W I/L0.3dB

SIZE

VSWR:1.2 N CW Circulator

DWG NO.

0130N23250201P