




0130S23250201P

Circulator

**2.5-2.7GHz 23dB A:100W I/L0.3dB
VSWR:1.2 SMA CW Circulator**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	2.5-2.7GHz
Isolation	23dB(Min.)
VSWR	1.2:1(Max.)
Insertion Loss	0.3dB(Max.)
Impedance	50Ohm
Power	Forward:100W (CW)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Outling Drawing (Unit:mm)

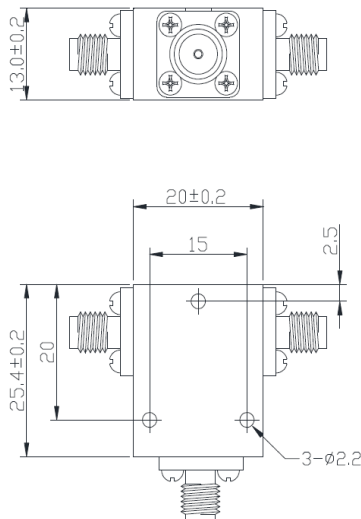

Test Report

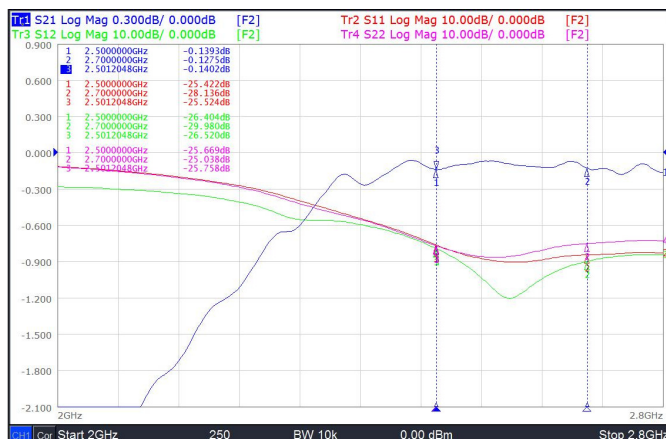

All Specification Changed Without Notification.