



0140A17100201R

Isolator

1-2GHz 17dB A:100W I/L0.65dB
VSWR:1.4 SMA Isolator

Features

- Optional removable connectors for Assembly integration
- Low VSWR
- High Isolation



Electrical Specifications

Frequency	1-2GHz
Isolation	17dB(Min.)
VSWR	1.4:1(Max.)
Insertion Loss	0.65dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.) Reverse:20W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	0~+60°C
-----------------------	---------

Outling Drawing (Unit:mm) Tolerance:±2%

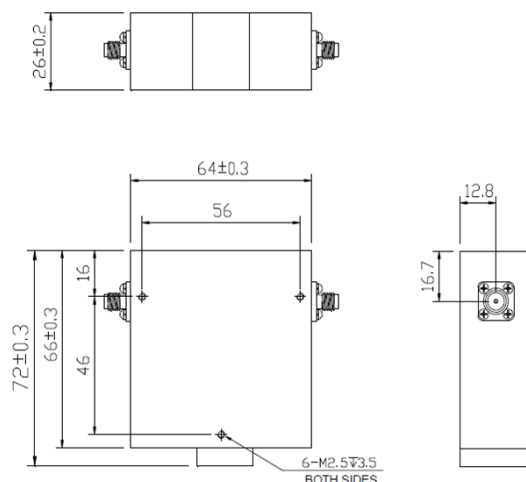

Test Report

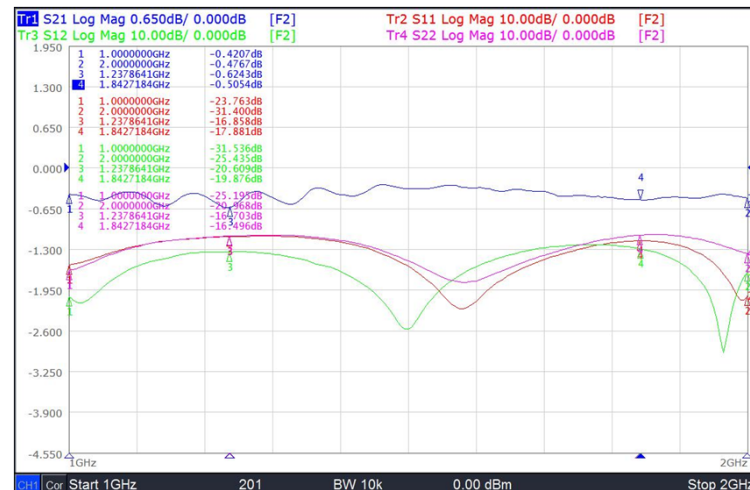

All Specification Changed Without Notification.