



0140A18070102R

Isolator

**0.7-1GHz 20dB A:200W I/L0.5dB
VSWR:1.25 SMA CW Isolator**

Features

- ✓ Optional removable connectors for Assembly integration
- ✓ Low VSWR
- ✓ High Isolation

Electrical Specifications

Frequency	0.7-1GHz
Isolation	20dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:200W(Avg.) Reverse:20W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Outling Drawing (Unit:mm) Tolerance:±2%

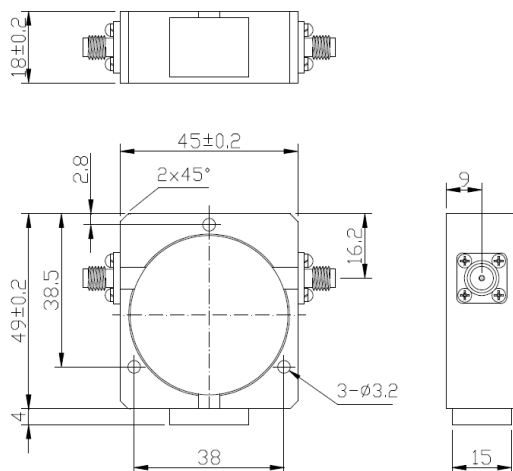

Test Report

