



0140A18200601R

Isolator

**2-6GHz 15dB A:20W I/L1.2dB
VSWR:1.5:1 SMA CW Isolator**

Features

- ✓ Optional removable connectors for Assembly integration
- ✓ Low VSWR
- ✓ High Isolation



Test Report



Electrical Specifications

Frequency	2-6GHz
Isolation	15dB(Min.)
VSWR	1.5:1(Max.)
Insertion Loss	1.2dB(Max.)
Impedance	50Ohm
Power	Forward:20W(Avg.) Reverse:20W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	10~+60°C
-----------------------	----------

Outling Drawing (Unit:mm)

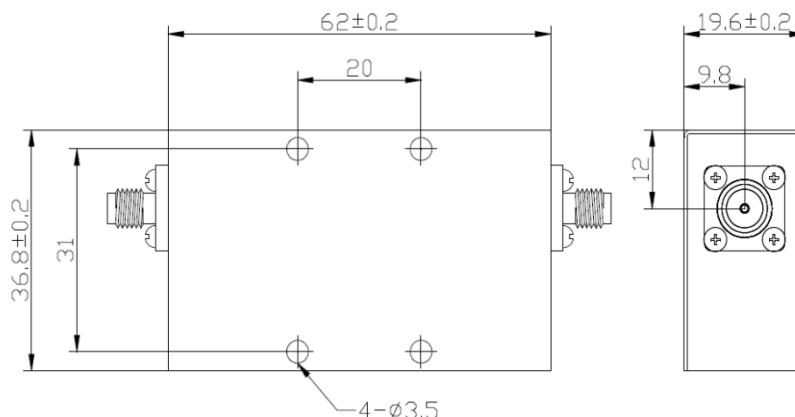

All Specification Changed Without Notification.