





0140A18300601R

Isolator

**3-6GHz 18dB 60W I/L0.5dB
VSWR:1.3:1 SMA CW Isolator**

Features


- Optional removable connectors for Assembly integration
- Low VSWR
- High Isolation



Test Report

Electrical Specifications

Frequency	3-6GHz
Isolation	18dB(Min.)
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:60W(CW) Reverse:20W
Connection	SMA Female
Direction	Clockwise

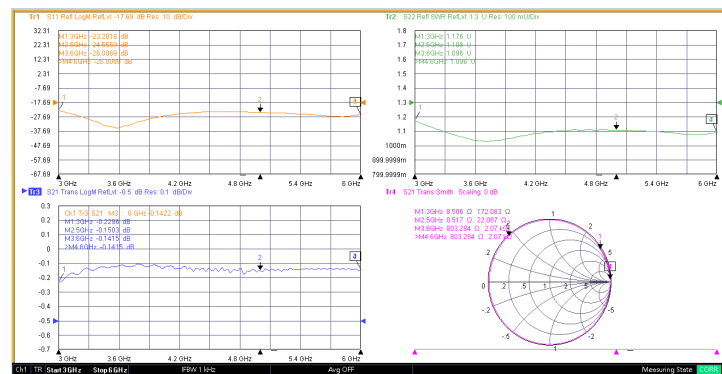


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-10~+60°C
-----------------------	-----------

Outling Drawing (Unit:mm)

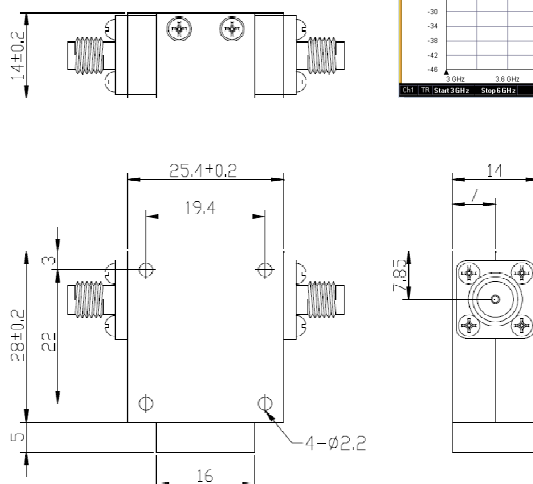

All Specification Changed Without Notification.