



0140A20060001P

Isolator

620-862MHz 20dB A:100W I/L0.5dB
VSWR:1.25 SMA CW Isolator

Features

- Optional removable connectors for Assembly integration
- Low VSWR
- High Isolation



Electrical Specifications

Frequency	620-825MHz
Isolation	20dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.) Reverse:30W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-20~+65°C
-----------------------	-----------

Outling Drawing (Unit:mm)

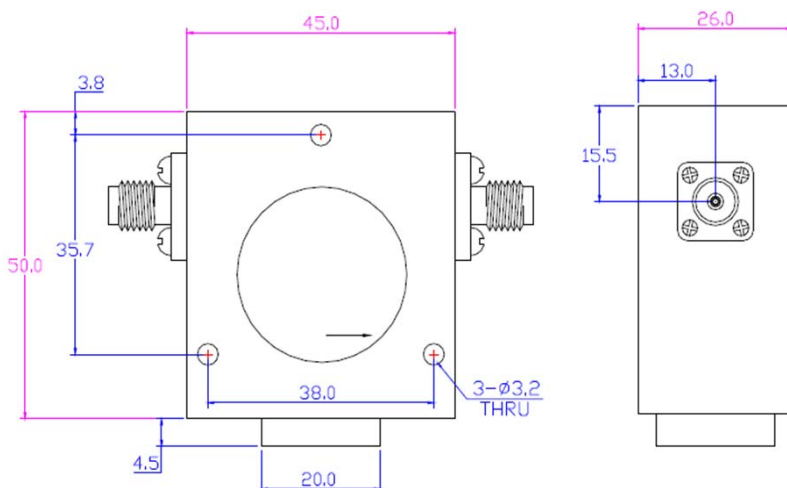

Test Report

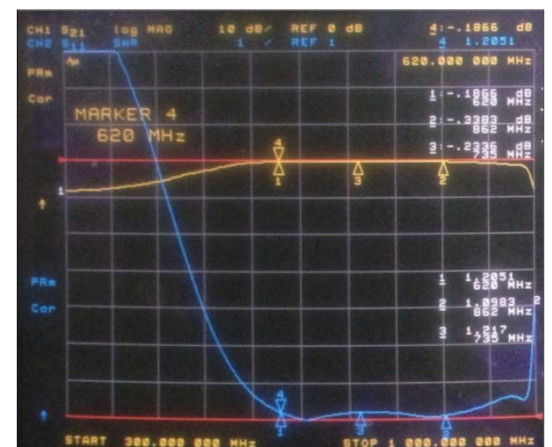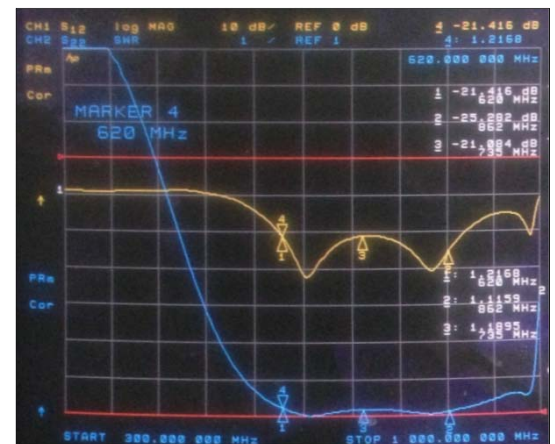

All Specification Changed Without Notification.