



0140A20150201P

Isolator

1.5–2.5GHz 20dB A:100W I/L0.5dB
VSWR:1.25 SMA CW Isolator

Features


- ✓ Optional removable connectors for Assembly
- ✓ integration
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	1.5-2.5GHz
Isolation	20dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.) Reverse:30W(Avg.)
Connection	SMA Female
Direction	Clockwise

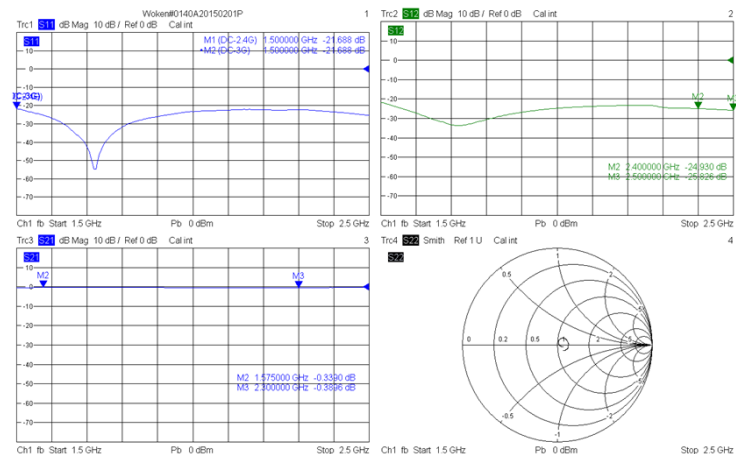


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-10~+70°C
-----------------------	-----------

Outling Drawing (Unit:mm)

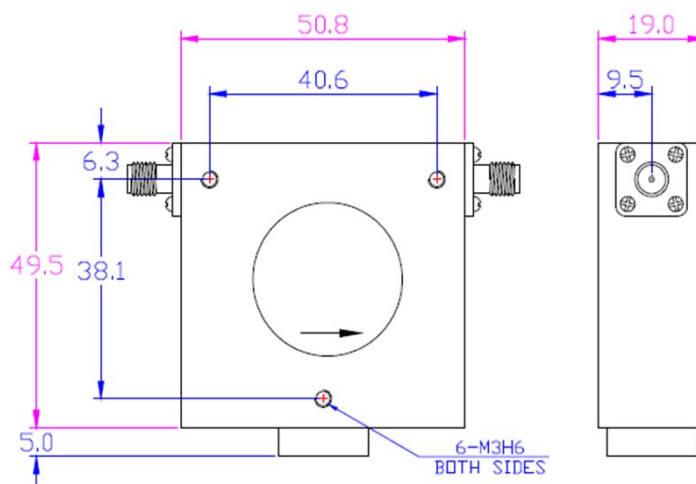

All Specification Changed Without Notification.