



0140A20500601P

Isolator

5-6GHz 18dB A:60W I/L0.4dB
VSWR:1.25 SMA Isolator

Features

- ✓ High Repeatability
- ✓ Low VSWR
- ✓ High Isolation



Test Report

Electrical Specifications


Frequency	5-6GHz
Isolation	20dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.4dB(Max.)
Impedance	50Ohm
Power	Forward:60W(Avg.) Reverse:20W(Avg.)
Connection	SMA Female
Direction	Clockwise

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-20~+65°C
-----------------------	-----------

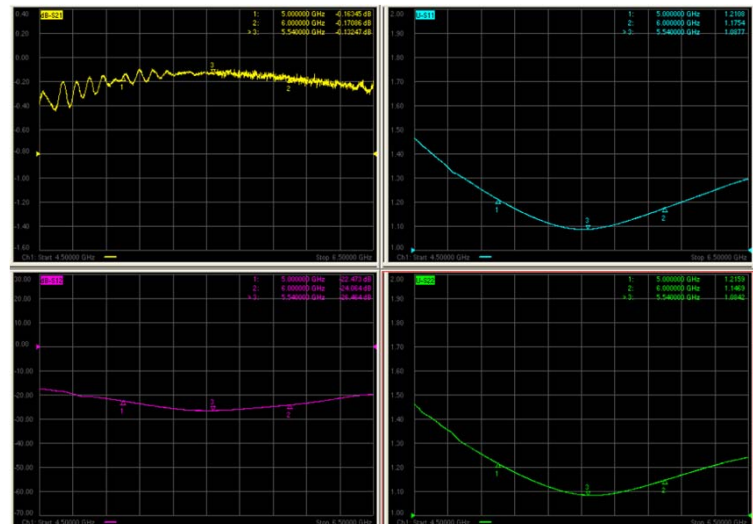

Outling Drawing (Unit:mm[inch]) Tolerance:±0.2mm

