

Features:

Small Size

Optional removable connectors for Assembly integration

Specifications:

Electrical:

Frequency:15-18GHz

Isolation:20dB(Min.)

VSWR:1.25:1(Max.)

Insertion Loss:0.5dB(Max.)

Power:Peak: 60W;Avg.:10W


Impedance: 50Ohm

Connection: SMA Female


Direction:Clockwise

Environmental:

Temperature:-30°C~70°C

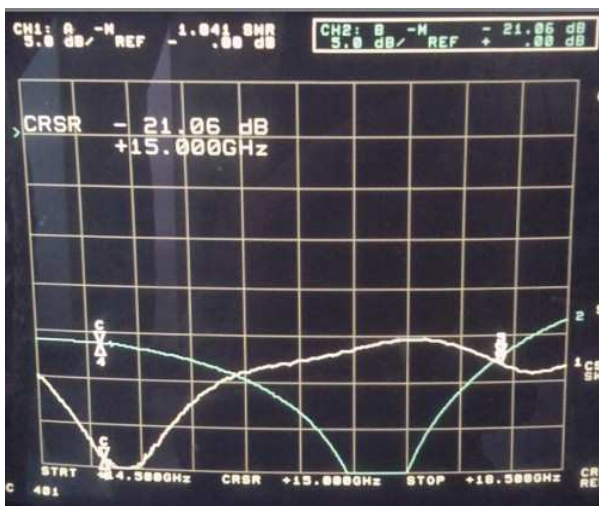

Unit:mm

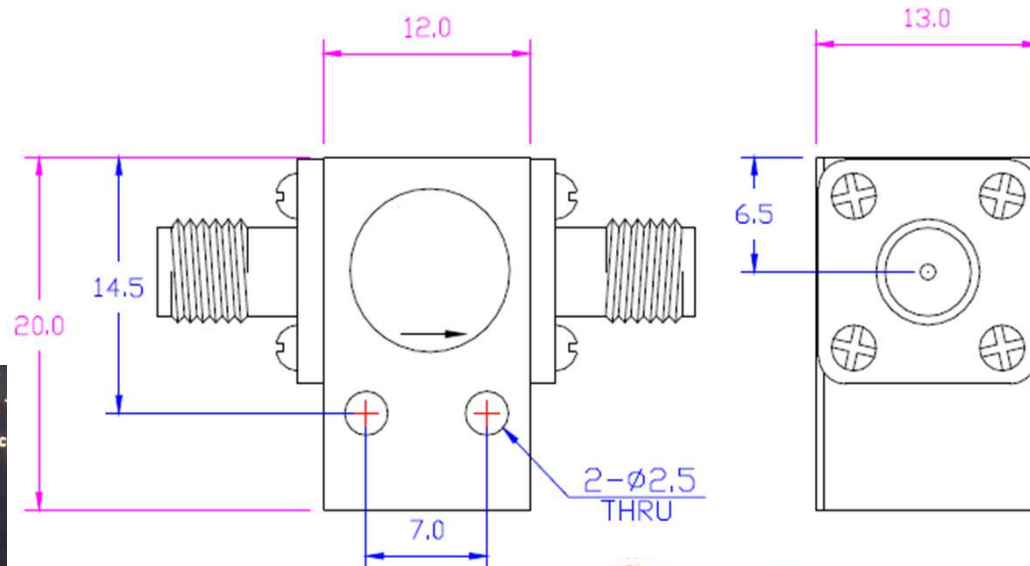

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

ENGR Jack

APVD James

04/01/11'

04/01/11'

04/01/11'



Woken Technology Inc.

CODE

DWG TITLE

15-18GHz 20dB A:60W/P:10W I/L0.5dB

SIZE

VSWR:1.25 SMA CW Isolator

DWG NO.

0140A20A01801P