




0140A40230201R

Isolator

**2.3–2.5GHz 40dB A:60W I/L0.8dB
VSWR:1.25 SMA CW Dual Junction
Isolator**

Features

- ✓ Optional removable connectors for Assembly integration
- ✓ Low VSWR
- ✓ High Isolation



Electrical Specifications

Frequency	2.3-2.5GHz
Isolation	40dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.8dB(Max.)
Impedance	50Ohm
Power	Forward:60W(CW) Reverse:20W
Connection	SMA Female
Direction	Clockwise

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Test Report



Outling Drawing (Unit:mm)

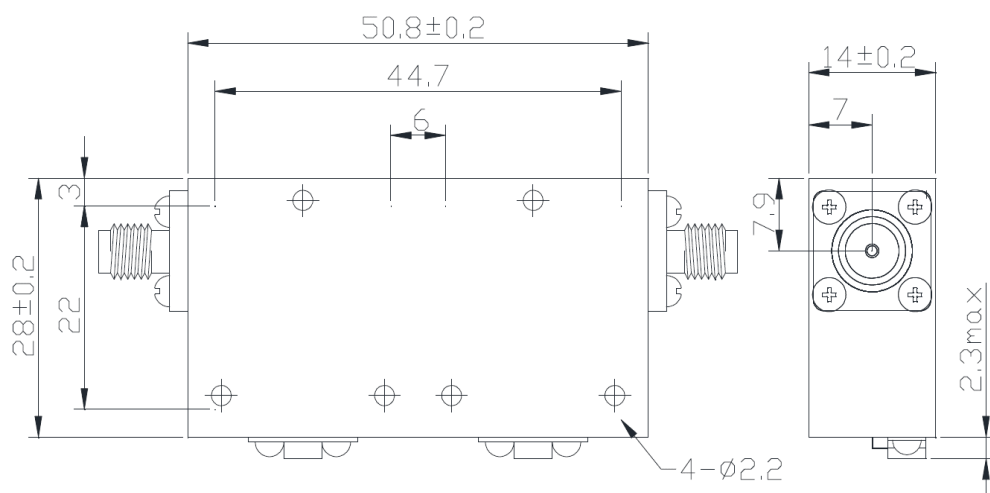

All Specification Changed Without Notification.