




0150A08A5C001M

Low Noise Amplifier

0.5–8GHz SMA Gain:30dB
P1dB:5dBm N.F. 3.5dB Low Noise Amplifier


Features

- ✓ Low Noise Figure
- ✓ Low VSWR
- ✓ Compact Size, Light Weight



Test Report

Gain/VSWR

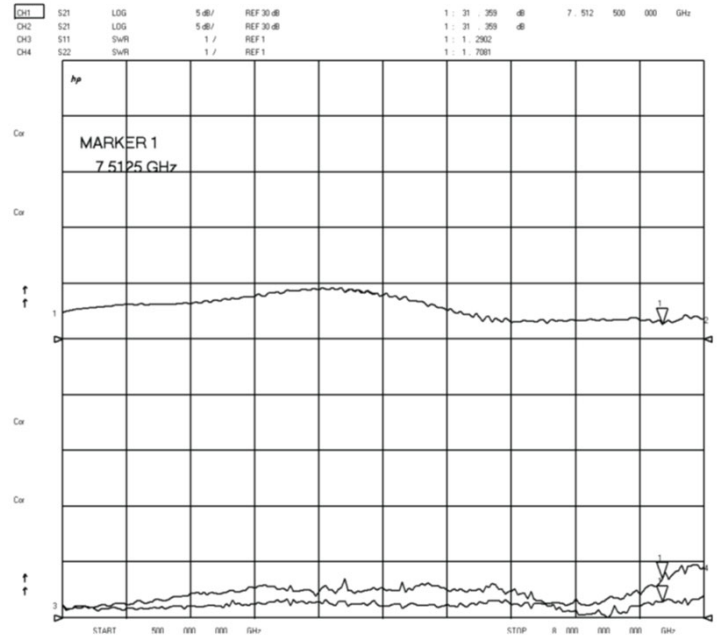

Electrical Specifications

Frequency	0.5-8GHz
VSWR	2.0:1(Max.)
Gain	30dB(Min.)
Gain Flatness	±2.0dB(Max.)
Noise Figure	3.5dB(Max.)
RF Input Power	+20dBm(Max.)
P1dB	5dBm(Min.)
OIP3	15dBm(Max.)
Supply Current	+12V,150mA
Impedance	50Ohm
Coaxial Connection	SMA Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~85°C
-----------------------	------------

Outling Drawing Unit:mm(inch) Tolerance:±0.2mm ,Hole:±0.1mm

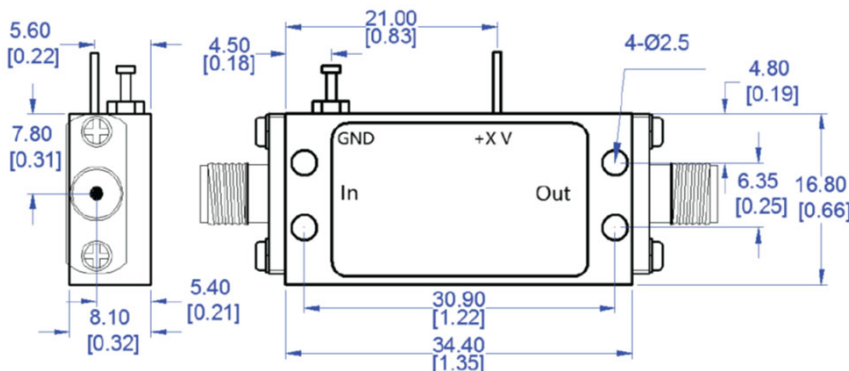

All Specification Changed Without Notification.