



0160N0012B101M

Coaxial Switch

12.4GHz N(F) 12VDC SPDT Failsafe Solder Terminal Coaxial Switch

Features

- ✓ High Repeatability
- ✓ Low VSWR




Electrical Specifications

Frequency	DC-12.4GHz
VSWR	1.2:1(Max.)@DC-3GHz
	1.35:1(Max.)@3-6GHz
	1.5:1(Max.)@6-12.4GHz
Insertion Loss	0.2dB(Max.)@DC-3GHz
	0.4dB(Max.)@3-6GHz
	0.5dB(Max.)@6-12.4GHz
Isolation	75dB(Min.)@DC-3GHz
	70dB(Min.)@3-6GHz
	60dB(Min.)@6-12.4GHz
Power Handling	200W CW@DC-3GHz
	120W CW@3-6GHz
	40W CW@6-12.4GHz
Impedance	50Ohm
Operating Voltage/Current:	DC12V/280mA
Operating Life	1,000,000 Cycles (Min.)
Switching Time	15ms
Actuation	Failsafe
Coaxial Connection	N Female

Environmental

Operating Temperature	-55°C~85°C
-----------------------	------------

Outling Drawing (Unit:mm)

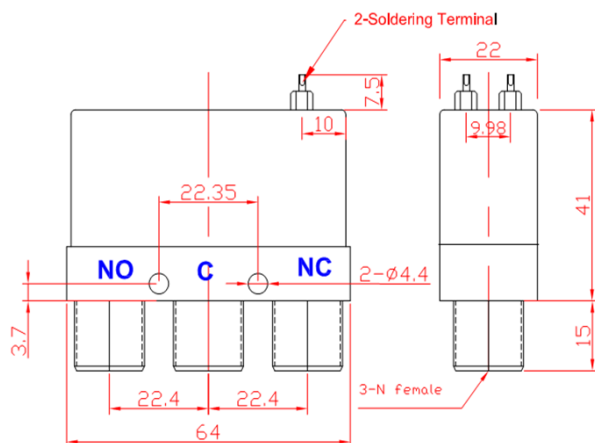

Note: 請將switch固定在具有散熱功能的鋁板上使用
另有含固定鋁板支架款可供選擇

All Specification Changed Without Notification.