



0169A00180001W

RF Switch Box

18GHz SMA SPDT Multiple Port RF Switch Box

Features

- ✔ High Repeatability
- ✔ Low VSWR



Test Report



Electrical Specifications

Frequency	18GHz
VSWR	1.1:1(Max.)@DC-1GHz
	1.2:1(Max.)@1-12GHz
	1.3:1(Max.)@12-18GHz
Insertion Loss	0.1dB(Max.)@DC-1GHz
	0.15dB(Max.)@1-12GHz
	0.25dB(Max.)@12-18GHz
Isolation(Ports)	90dB(Min.)@DC-1GHz
	80dB(Min.)@1-12GHz
	70dB(Min.)@12-18GHz
RF Input Power	12V/1A
Impedance	50Ohm
Operating Life	5,000,000 Cycles (Min.)
Switching Time	15ms
Coaxial Connection	SMA Female(1 input/2 out)
Control Interface:	RS232, USB Type B , LAN
Operating Voltage	DC12V/190mA

Environmental



Operating Temperature	-25~65°C
-----------------------	----------

支援程式化語言	c++, c#, Java, Delphi, VB, PHP, Python等
---------	---

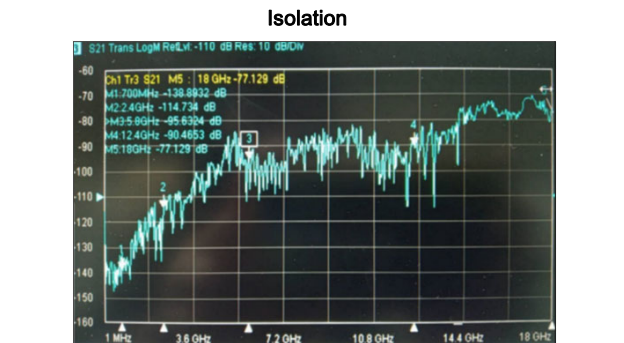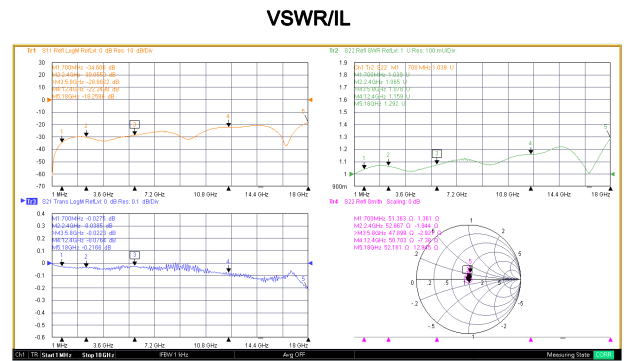

有支援Socket連線及傳送指令功能的程式都可以適用。

Outling Drawing (Unit:mm)

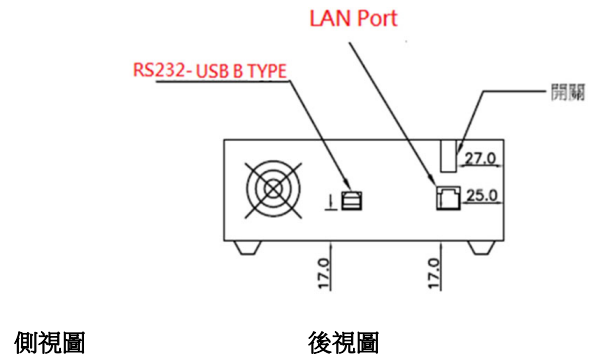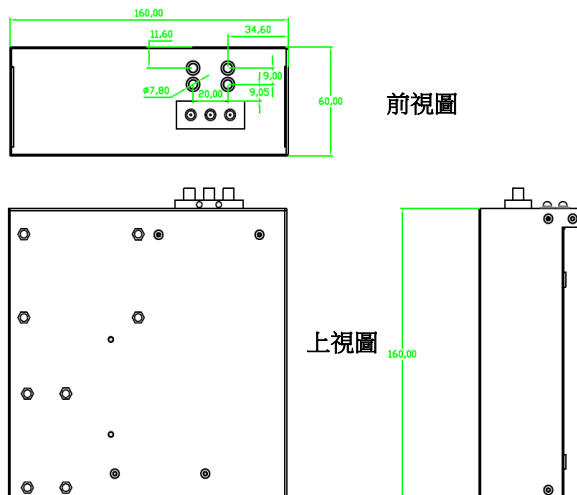

All Specification Changed Without Notification.