



0220A2060R001F

Hybrid



2-6GHz I.S.20dB SMA 50W 90°
Hybrid

Features

- ✓ Miniature Size
- ✓ Low VSWR
- ✓ Low Insertion Loss



Test Report

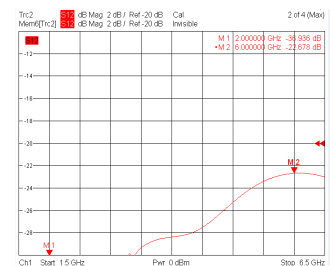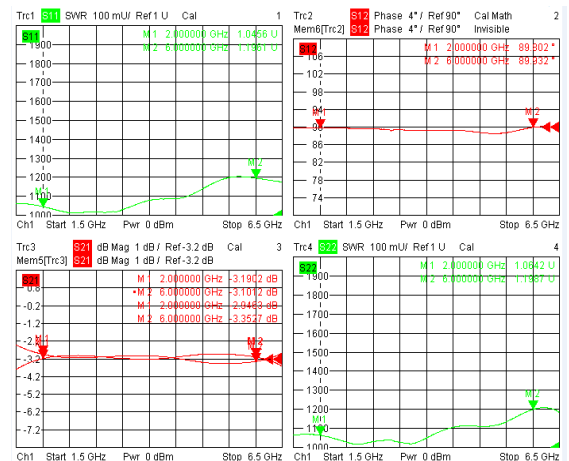

Electrical Specifications

Frequency	2-6GHz
Insertion Loss	1.0dB(Max.)
VSWR	1.4:1(Max.)
Isolation	20dB(Min.)
Phase Unblance	±8°(Max.)
Amplitude Balance	±0.8dB(Max.)
Handling Power	50W(Avg.)
Impedance	50Ohm
Connection	SMA


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~70°C
-----------------------	------------

Outling Drawing (Unit:mm[inch])

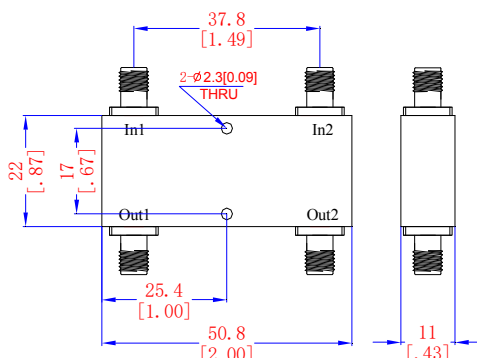

All Specification Changed Without Notification.