



0220A20D0R001F

Hybrid

2-40GHz I.S.10dB 2.92mm 20W 90°
Hybrid Copler

Features

- ✓ Miniature Size
- ✓ Low VSWR
- ✓ Low Insertion Loss



Electrical Specifications

Frequency	2-40GHz
Insertion Loss	2.5dB(Max.)
VSWR	2.0:1(Max.)
Isolation	10dB(Min.) 12dB(Typ.)
Phase Unbalance	±12°(Max.)
Amplitude Balance	±1.5dB(Max.)
Handling Power	20W(Avg.) 0.2KW(Peak)
Impedance	50Ohm
Connection	2.92mm


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-45°C~85°C
-----------------------	------------

Outling Drawing (Unit:mm[inch]) Tolerance:±0.3mm

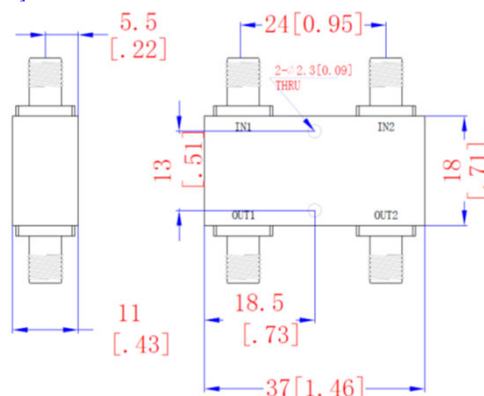

All Specification Changed Without Notification.