




0230A05010301L

Bias Tee

0.001-3GHz RF+DC:SMA(F),
RF: SMA(F), DC: SMA(F) 50V 3A Bias
Tee

Features


- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	1-3000MHz
VSWR	1.3:1(Max.)
Insertion Loss	1.2dB(Max.)
Isolation:	25dB(Min.)
DC Voltage	50VDC(Max.)
DC Current	3A(Max.)
Bias-Path Resistance	0.1Ohm(Max.)
RF Power	1W(Max.)
Impedance	50Ohm
Connection	RF Input Port:SMA Female RF Output Port:SMA Female DC Input Port:SMA Female

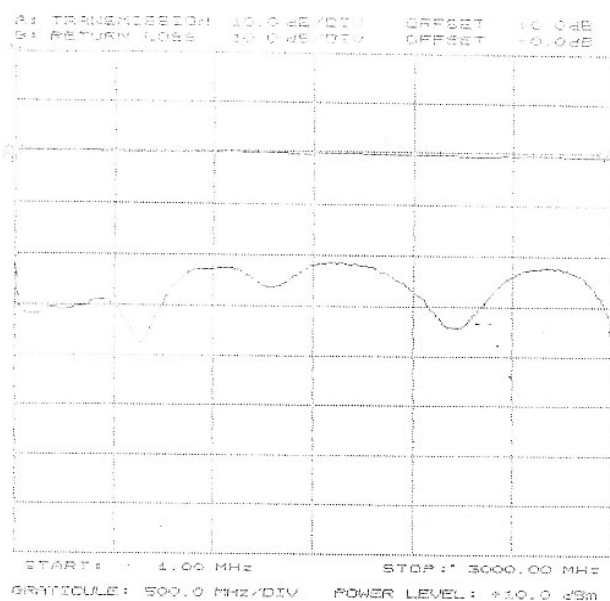

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Outling Drawing (Unit:mm)

