



0230A05010801L

Bias Tee

1-8GHz RF+DC:SMA(F), RF: SMA(F),
DC: SMA(F) 50V 250mA Bias Tee

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	1-8GHz
VSWR	1.5:1(Max.)
Insertion Loss	0.8dB(Max.)
Isolation:	30dB(Min.)
DC Voltage	50VDC(Max.)
DC Current	250mA(Max.)
Bias-Path Resistance:	0.1Ohm(Max.)
RF Power	2W(Max.)
Impedance	50Ohm
Connection	RF Input Port:SMA Female RF Output Port:SMA Female DC Input Port:SMA Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Test Report

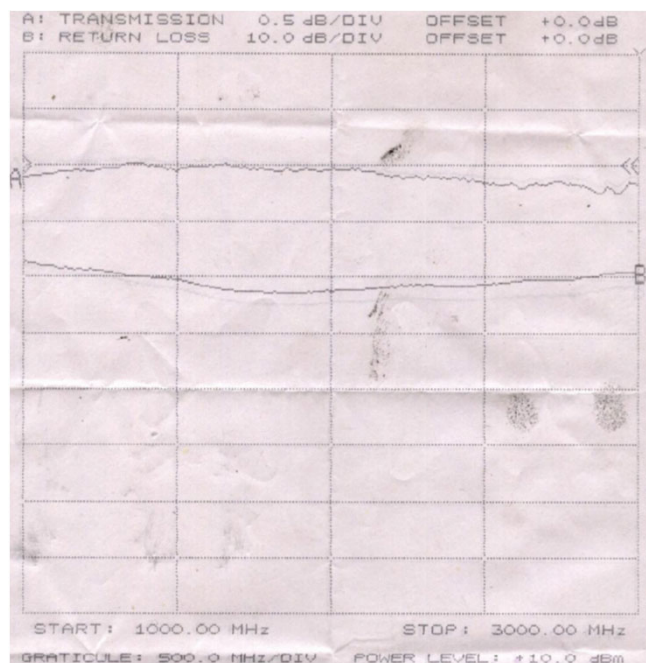

Outling Drawing (Unit:mm)

