



0230A10021801L

Bias Tee

**2-18GHz RF+DC:SMA(F), RF:SMA(F),
DC: SMA(F) 100V 6A BiasTee**

Features


- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	2-18GHz
VSWR	2.0:1(Max.)
Insertion Loss	2.5dB(Max.)
Isolation:	25dB(Min.)
DC Voltage	100VDC(Max.)
DC Current	6A(Max.)
RF Power	1W(Max.)
Impedance	50Ohm
Connection	RF Input Port:SMA Female RF Output Port:SMA Female DC Input Port:SMA Female

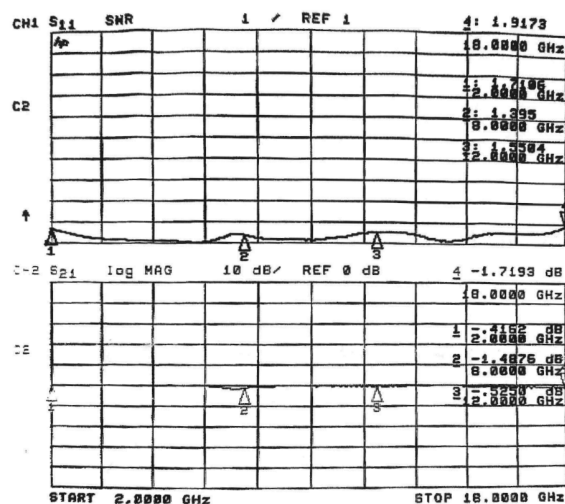

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Outling Drawing (Unit:mm)

