



0230A10050201L

Bias Tee


0.005-2GHz RF+DC:SMA(F),
RF:SMA(F), DC: Solder 100V 3A
BiasTee

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

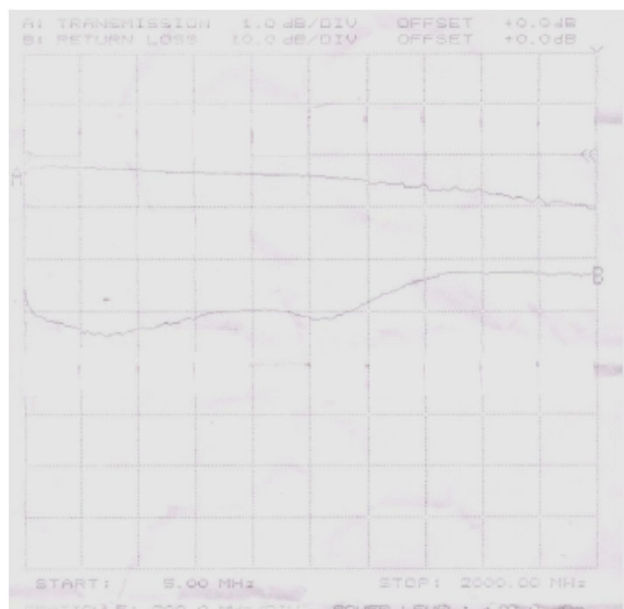

Electrical Specifications

Frequency	5-2000MHz
VSWR	1.5:1(Max.)
Insertion Loss	1.6dB(Max.)
Isolation:	30dB(Min.)
DC Voltage	100VDC(Max.)
DC Current	3A(Max.)
Bias-Path Resistance	0.1Ohm(Max.)
RF Power	2W(Max.)
Impedance	50Ohm
Connection	RF Input Port:SMA Female RF Output Port:SMA Female DC Input Port:Solder Post

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Outling Drawing (Unit:mm)

