



0230F50100201L

Bias Tee

0.95–2.15GHz RF+DC: F(F), RF:F(F),
DC: Banana Jack 75Ω 80V 6A Bias
Tee

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	0.95-2GHz
VSWR	1.4:1(Max.)
Insertion Loss	0.8dB(Max.)
Isolation:	30dB(Min.)
DC Voltage	80VDC(Max.)
DC Current	6A(Max.)
Bias-Path Resistance	0.1Ohm(Max.)
RF Power	2W(Max.)
Impedance	75Ohm
Connection	RF Input Port:F Female RF Output Port:F Female DC Input Port:Banana Jack


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------


Outling Drawing (Unit:mm)

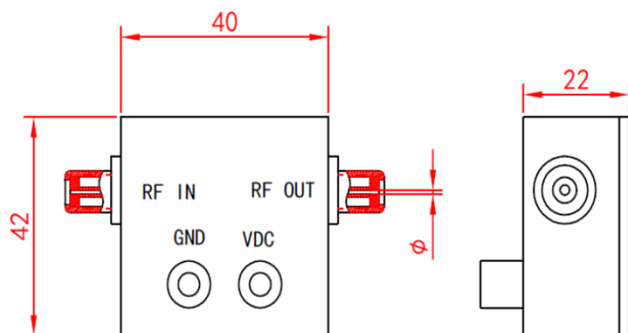

Note.The F type thread is 3/8-32UNEF.

Accept Male Pin Range:0.8~1.0mm.

Threads not specifically marked are Imperial Unites.



All Specification Changed Without Notification.