

4

3

2

1

Specifications:**Electrical:**

Frequency:10MHz~3000MHz

Directional:29dB(Min.)

Insertion Loss:8dB(Max.) (Source-Termination)

12dB(Typ.) (Input-Output)

Port Matching:31dB(Typ.)(Return Loss)


Power:1.5W

Impedance:50 Ohm

Connection:N

Mechanical:

Size:150x100x35mm

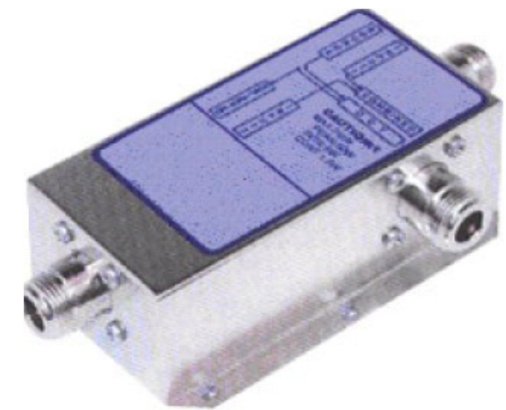UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

Terence

04/19/11'

ENGR

Jack

04/19/11'

APVD

James

04/19/11'



Woken Technology Inc.

CODE

DWG TITLE

10MHz~3000MHz 50Ω N

VSWR Bridge//L:8dB

SIZE
A4

DWG NO.

0250N29153001C

4

3

2

1