



0300A1D220001L

Impedance Matching Pad

**2GHz 50ΩSMA(M)–75ΩBNC(F)
Impedance Matching Pad**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-2GHz
VSWR	1.15:1(Max.)
Insertion Loss	6.0dB(Typ.)
Connection 1	50Ohm SMA Male
Connection 2	75Ohm BNC Female


Mechanical

Durability	500 Cycles
------------	------------


Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Test Report

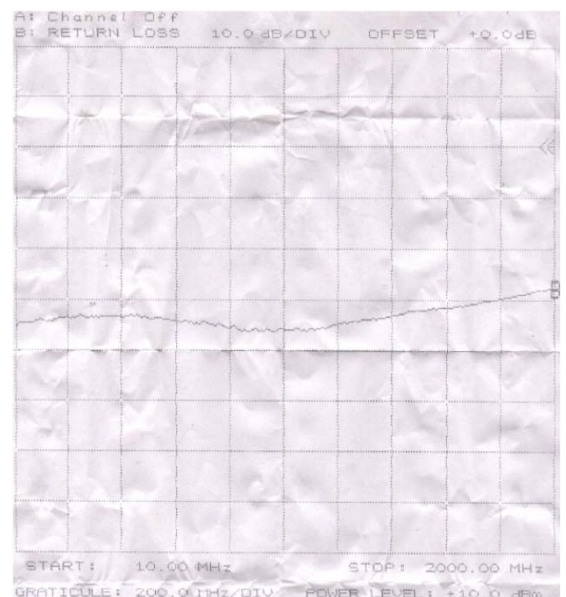

Outling Drawing (Unit:mm)

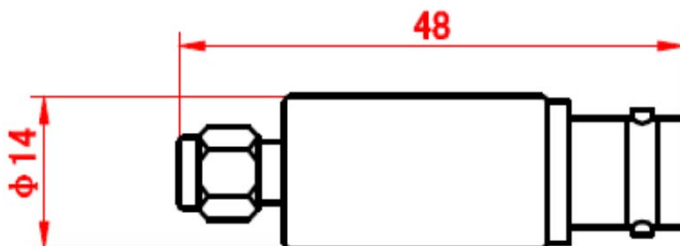

All Specification Changed Without Notification.