



0300A1F220001L

Impedance Matching Pad

2GHz 50ΩSMA(M)–75ΩF(F) Impedance Matching Pad

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-2GHz
VSWR	1.15:1(Max.)
Insertion Loss	5.7±0.5dB(Max.)
Connection 1	50Ohm SMA Male
Connection 2	75Ohm F Female


Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
SMA Body	Stainless Steel	
Center Pin	Brass	Gold
Insulator	Teflon	
F Body	Brass	Nickel


Test Report

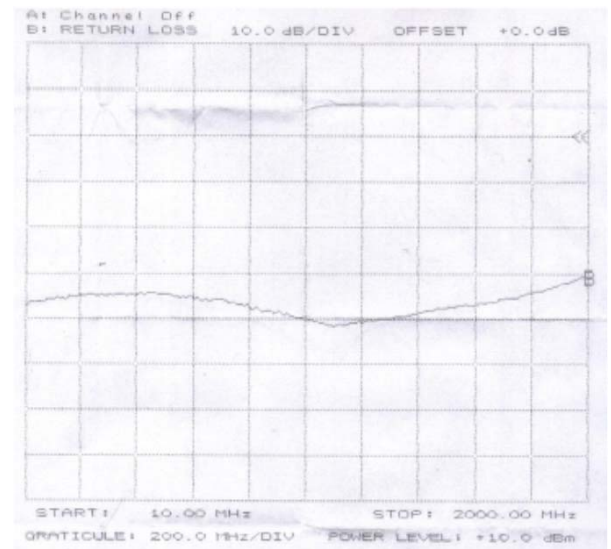

Outling Drawing (Unit:mm)

Note. 只可插入直徑0.8-1mm的針,F端螺紋為3/8"-32

未特別標示螺紋皆為英制標準(Imperial Unites)

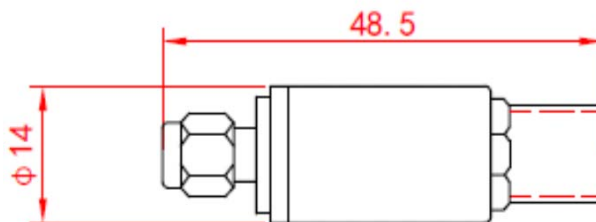

All Specification Changed Without Notification.