




0300A2F220001L

Impedance Matching Pad

2GHz 50ΩSMA(F)–75ΩF(F) Impedance Matching Pad

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-2GHz
VSWR	1.1:1(Max.)@DC-1GHz 1.15:1(Max.)@1-2GHz
Insertion Loss	5.7±0.5dB(Typ.)
Connection 1	50Ohm SMA Female
Connection 2	75Ohm F Female


Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
SMA Body	Stainless Steel	
F Body	Brass	Nickel
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm)

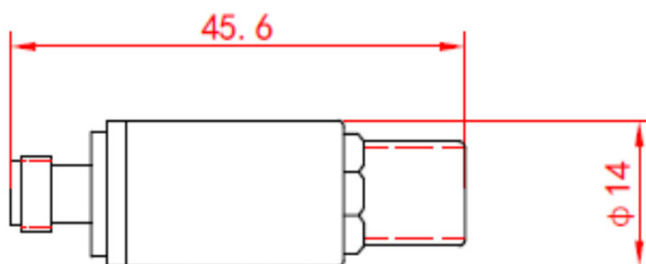

Note.

只可插入直徑0.8-1mm的針,F端螺紋為3/8"-32
未特別標示螺紋皆為英制標準(Imperial Unites)

All Specification Changed Without Notification.