



0300A2F230001L

Impedance Matching Pad

3GHz 50ΩSMA(F)–75ΩF(F)
Impedance Matching Pad

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-3GHz
VSWR	1.2:1(Max.)
Insertion Loss	6.0dB(Typ.)
Connection 1	50Ohm SMA Female
Connection 2	75Ohm F Female


Mechanical

Durability	500 Cycles
------------	------------


Material

Part	Material	Plated
SMA Body	Stainless Steel	
F Body	Brass	Nickel
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Test Report

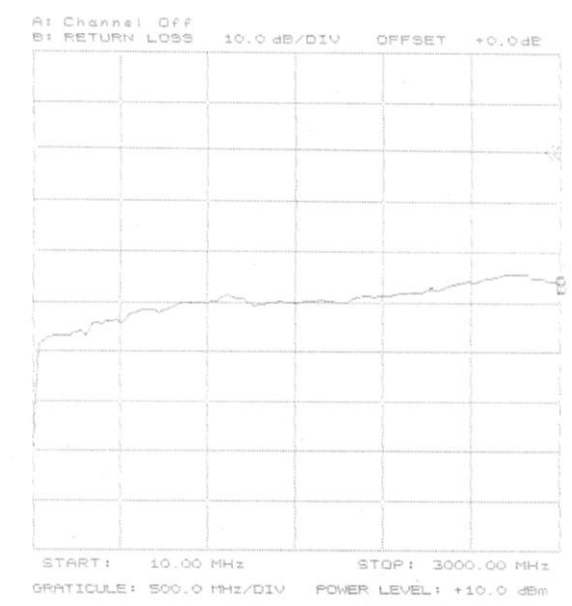

Outling Drawing (Unit:mm)

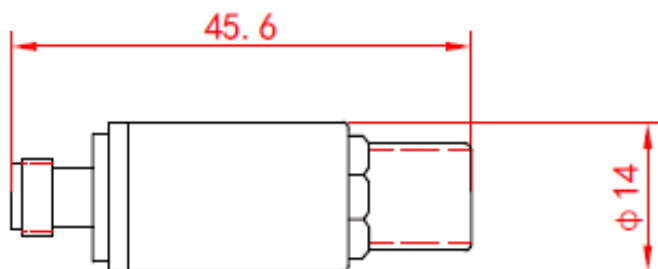

Note. 只可插入直徑0.8-1mm的針,F端螺紋為3/8"-32
螺紋皆為英制標準(Imperial Unites)

All Specification Chanaed Without Notification.