

4

3

2

1

Features:

High Repeatability

Low VSWR



Unit:mm

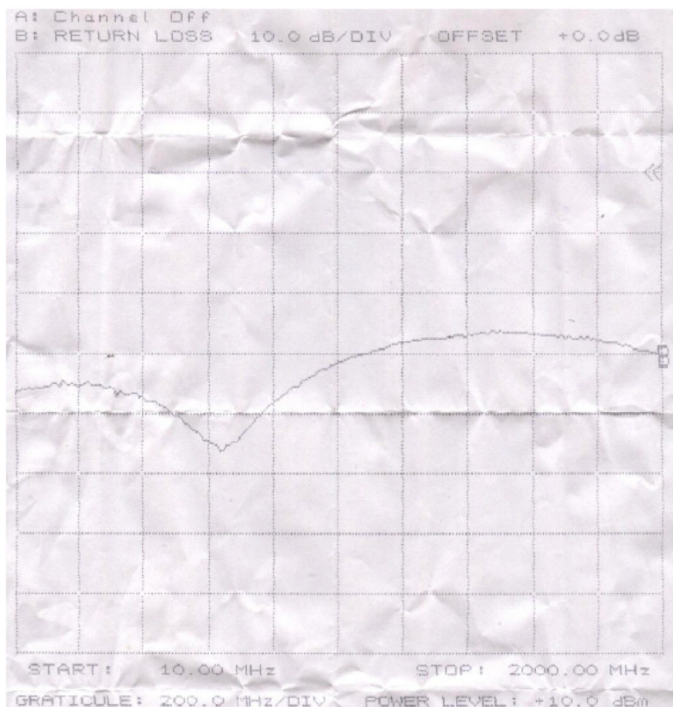
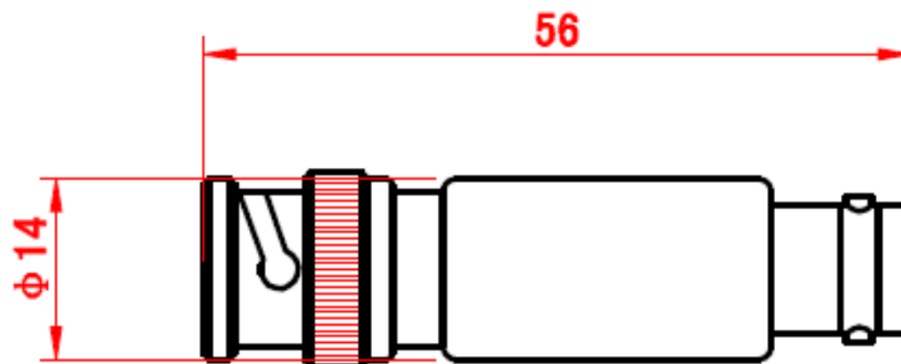
Specifications:**Electrical:**

Frequency:DC-2GHz

VSWR:1.15:1(Max.)

Insertion Loss:5.7±0.5dB (Max.)

Connection: 50ΩBNC Male to 75ΩBNC Female

**Material:**

Part	Material	Plated
Body	Brass	Nickel
Center Pin	BeCu	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

06/10/10'

06/10/10'

06/10/10'



Woken Technology Inc.

CODE

DWG TITLE

2GHz 50ΩBNC Male to 75ΩBNC Female

SIZE

A4

Impedance Matching Pad

REV

A

DWG NO.

0300D1D220001L

4

3

2

1