



0300D1F220001L

Impedance Matching Pad

2GHz 50ΩBNC(M)–75ΩF(F)
Impedance Matching Pad

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-2GHz
VSWR	1.15:1(Max.)
Insertion Loss	6.0dB(Typ.)
Connection 1	50Ω BNC Male
Connection 2	75Ω F Female


Mechanical

Durability	500 Cycles
------------	------------


Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm)

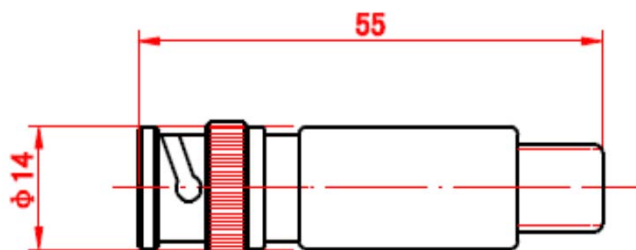

Test Report

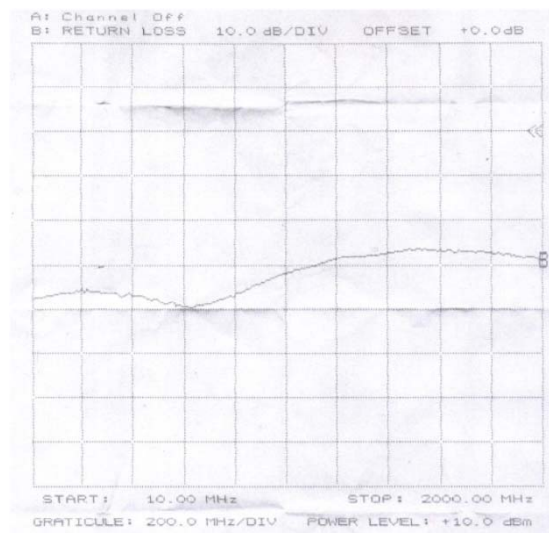

Note. 只可插入直徑0.8-1mm的針,F端螺紋為3/8"-32
螺紋皆為英制標準(Imperial Unites)

All Specification Changed Without Notification.