

Features:

High Repeatability

Low VSWR



Specifications:

Electrical:


Frequency:DC-2GHz

VSWR:1.15:1(Max.)



Insertion Loss:5.7±0.5dB (Max.)

Connection: 50ΩN Male to 75ΩF Female

Unit:mm

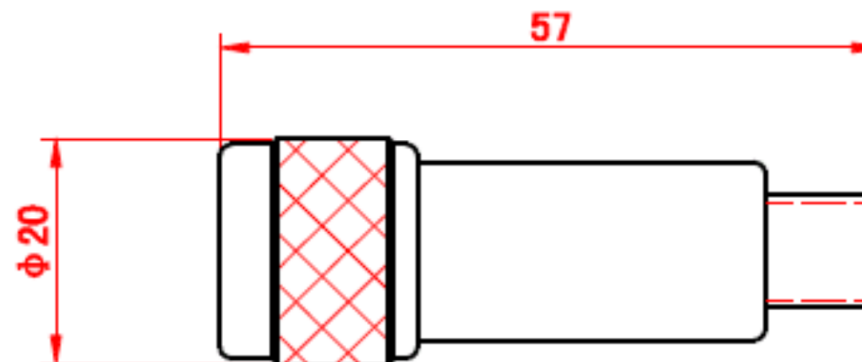

Note. 只可插入直徑0.8-1mm的針,F端螺紋為3/8"-32
未特別標示螺紋皆為英制標準(Imperial Unites)

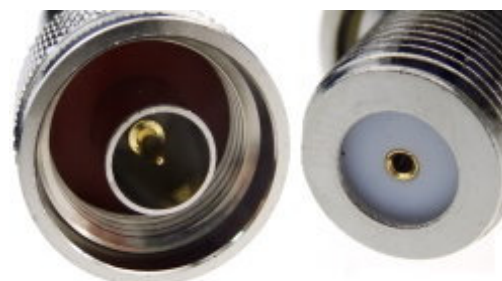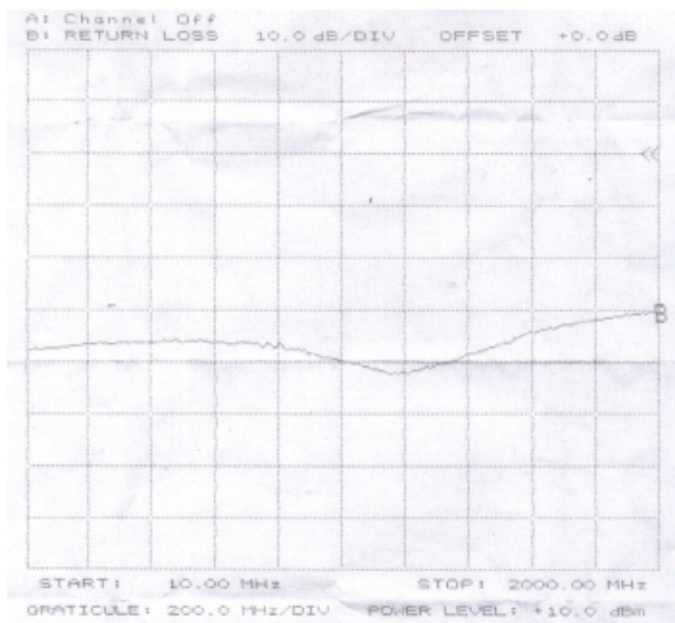

WOKEN
technologyinc.



WOKEN
technologyinc.

Material:

Part	Material	Plated
Body	Brass	Nickel
Center Pin	BeCu	Gold
Insulator	Teflon	


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ± TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN Terence

ENGR Jack

APVD James

06/10/10'

06/10/10'

06/10/10'



Woken Technology Inc.

CODE

DWG TITLE

2GHz 50ΩN Male to 75ΩF Female

SIZE

Impedance Matching Pad

A4

REV

A

DWG NO.

0300N1F220001L