



90413-M19071-7

Testing Probe


6GHz 50Ω IP A13(F)-SMA(M) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

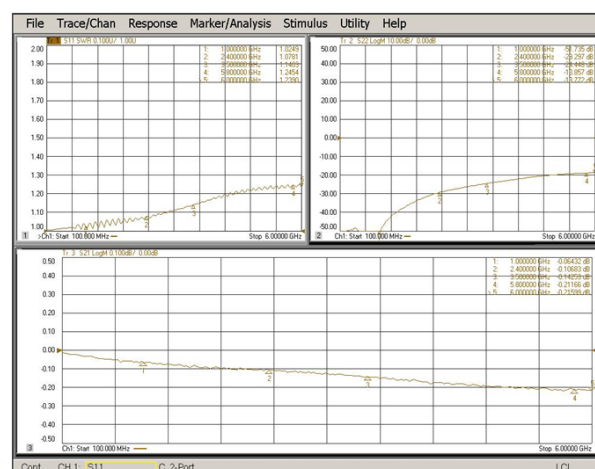

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)@DC-3GHz 1.3:1(Max.)@3-6GHz
Insertion Loss	0.3dB(Max.)@DC-3GHz 0.5dB(Max.)@3-6GHz
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	IP A13 Female(Receptacle)
Ref.	90413-001

Mechanical

Durability	500 Cycles (Min.)
------------	-------------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone	Red
Shell	Brass	Nickel

Note.

1. 測試數據為實驗室測試值
2. 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為

Outling Drawing (Unit:mm) Tolerance:±0.1mm

