



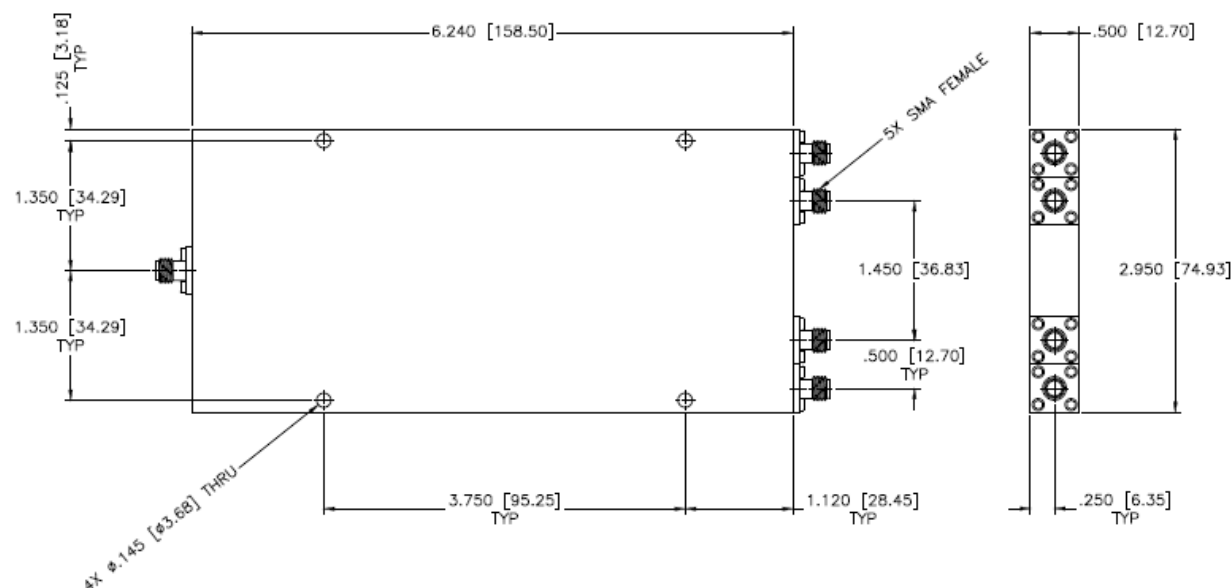

Wake up your further dream.

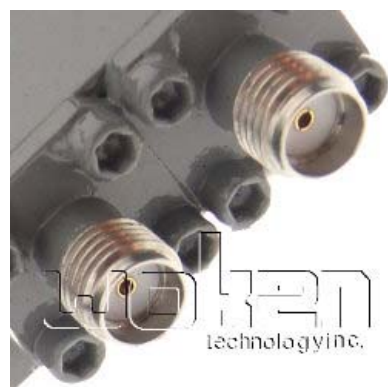

SPECIFICATIONS

Frequency Range: 0.5–26.0 GHz
 Insertion Loss: 5.2dB Max.
 Isolation: 15dB Min.
 VSWR: 1.65:1 Max.
 Phase Balance: ± 12 Deg. Max.
 Amplitude Balance: ± 1.2 dB Max.

MATERIAL: 		MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-6116 HTTP://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET:	N/A
DRAWING: Paiboon Luakhamthan		DATE: 12-11-2007		DRAWING TITLE: 4-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 12-11-2007		PART NO.: PS4-16	
DATE CODE: 0D2L5		SIZE: N/A		REV.: A	
DO NOT SCALE THE DRAWING		DWG. NO.: 83017			