


Testing Probe

Features



Electrical Specifications

Frequency	DC-8GHz
VSWR	1.3:1(Max.)@DC-6GHz
	1.5:1(Max.)@6-8GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	WST-3

Mechanical


Durability	WST-3:10K Cycles (Min.) SMA:500Cycles(Min.)
------------	--

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Spring	Spring Steel	
Center Pin	Brass	Gold
Shell	Brass	Gold

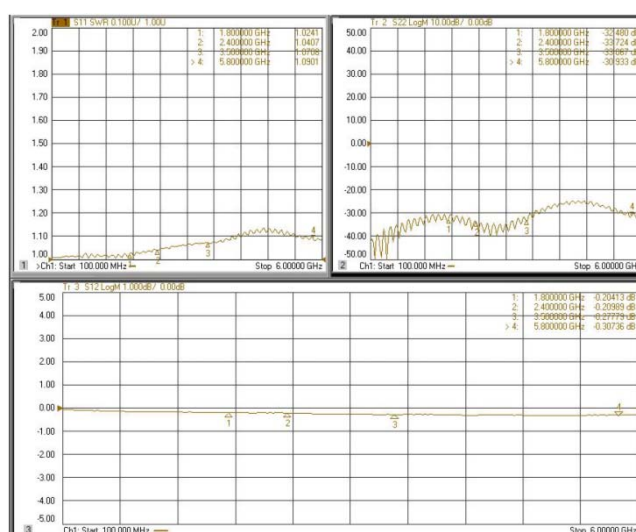

2. 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為主

Outling Drawing (Unit:mm) Tolerance:±0.1mm

