



ST4-F30101-7

Testing Probe

6GHz 50Ω SMA(F)/Nickel-WST-4
Φ3.0/Gold Adapter

Features

- High Repeatability
- Low VSWR



Test Report

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ω
Connection 1	SMA Female
Connection 2	WST-4

Mechanical


Durability	SMA:500Cycles (Min.)
	WST-4:10K Cycles (Min.)

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
WST-4 Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Spring	Spring Steel	
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
SMA Body	Brass	Nickel
Shell	Brass	Gold

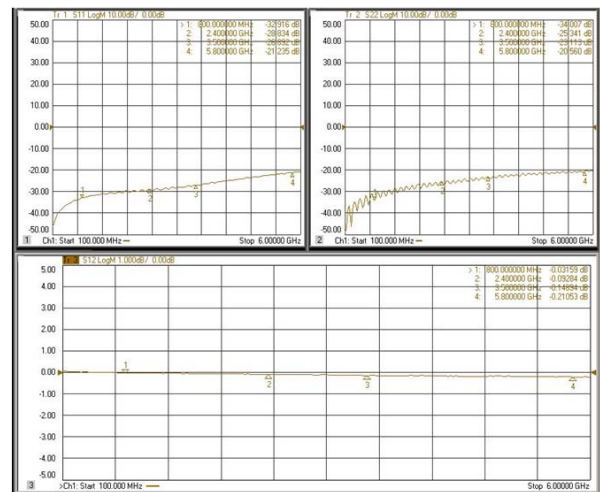

Note.

- 測試數據為實驗室測試值
- 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為主

Outling Drawing (Unit:mm) Tolerance:±0.2mm

