

10MHZ-8GHZ SMA(M-F) INNER D.C. BLOCK /STAINLESS STEEL P/NO.STI09-0004



SPECIFICATION


Frequency	10MHz~8GHz
Insertion Loss:	0.5dB(Max.)
Return Loss:	19dB(Min.)@10MHz~6GHz 17.6dB(Min.)@6~8GHz
DC Input Voltage:	50V(Max.)
Power:	2W
Impedance:	50Ohm
Durability:	500 Cycles
Temperature:	-40°C ~70°C

MATERIAL LIST


Part	Material	Plated
Housing	Stainless Steel	
Center Conductor	Brass /Beryllium Copper	Gold
Insulator	Teflon	

OUTLINE DRAWING

Unit:mm Tolerance:±0.2mm

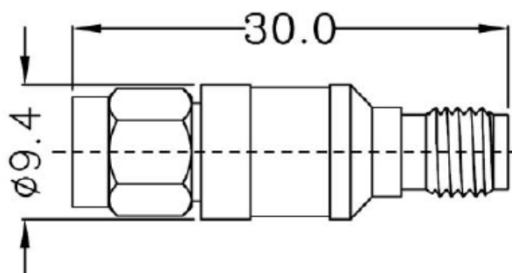

TESTING DATA (100% S-PARAMETER TESTED)

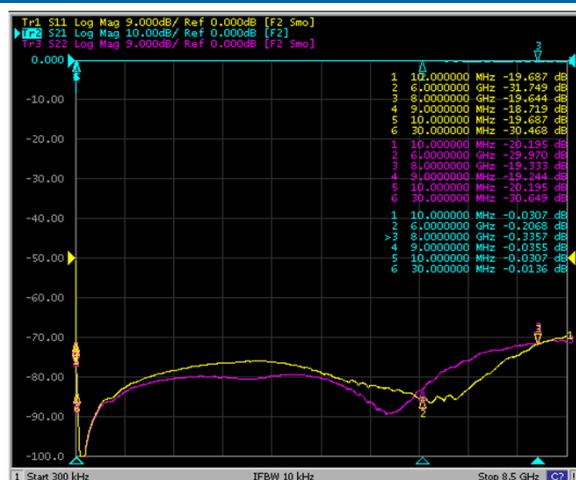

Any more request, please contact sales@solvangtech.com. Thank you ~