



0.45-4GHZ RF:N FEMALE/N MALE,

DC:CABLE POWER INSERT/IP65,PIM<=145DBC

P/NO.STI23-0003



SPECIFICATION


Frequency	0.45-4GHz
VSWR:	1.5:1(Max.)
Insertion Loss:	0.6dB(Max.)
PIM:	<-145dBc @2X30dBm
Impedance:	50Ohm
Temperature:	-35℃~55℃
Waterproof Level:	IP65
Connector:	RF:N Female/N Male
	DC:36±2cm Cable

MATERIAL LIST

Part	Material	Plated
Housing	Aluminum	Black

OUTLINE DRAWING

Unit:mm[icth]

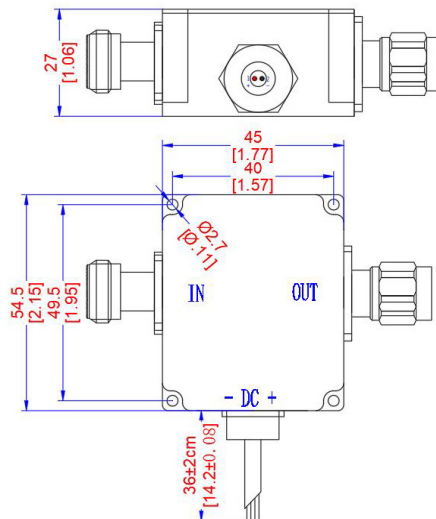

TESTING DATA (100% S-PARAMETER TESTED)

