

## Part No. WADP-24F29MR

40GHz 2.4mm(F)-2.92mm (M) R/A 50Ω Adapter/Stainless Steel



### Features:

- High repeatability
- Low VSWR



### Electrical Specification

|                |                            |
|----------------|----------------------------|
| Frequency      | DC-40GHz                   |
| Impedance      | 50 Ohm                     |
| V.S.W.R        | 1.25:1 Max.                |
| Connector Type | 2.4mm Female – 2.92mm Male |

### Mechanical Specification

|            |           |
|------------|-----------|
| Durability | 500Cycles |
|------------|-----------|

### Material Specification


|                |                                                |
|----------------|------------------------------------------------|
| Housing        | Type 303 Stainless Steel-Polished & Passivated |
| Center Contact | Gold Plated Beryllium Copper                   |
| Insulator      | PEI                                            |

### Environmental Specification

|                       |           |
|-----------------------|-----------|
| Operating Temperature | -55~+165℃ |
|-----------------------|-----------|

### Outline

Unit:mm(inch)

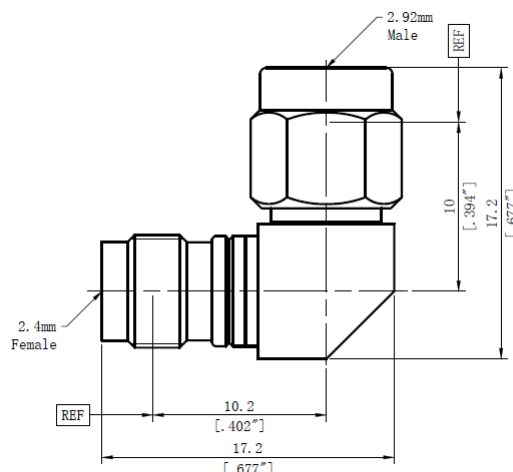

## Test Report

