

Part No. WADP-24MSPPM(F)

50GHz 2.4mm(M)-SMPM(M) Full Detent 50Ω Adapter/Stainless Steel



Features:

- High repeatability
- Low VSWR



Electrical Specification

Frequency	DC-50GHz
Impedance	50 Ohm
V.S.W.R	1.3:1 Max.
Connector Type	2.4mm Male – SMPM Male Full Detent

Mechanical Specification

Durability	2,000Cycles
SMP Mechanical Force	Engage force : 28.89N Max. Disengage force: 22.22 Min.

Material Specification


Housing	Type 303 Stainless Steel-Polished & Passivated
Center Contact	Beryllium Copper Plated Gold
Insulator	PEEK

Environmental Specification

Operating Temperature	-55~+165°C
-----------------------	------------

Outline

Unit:mm(inch)

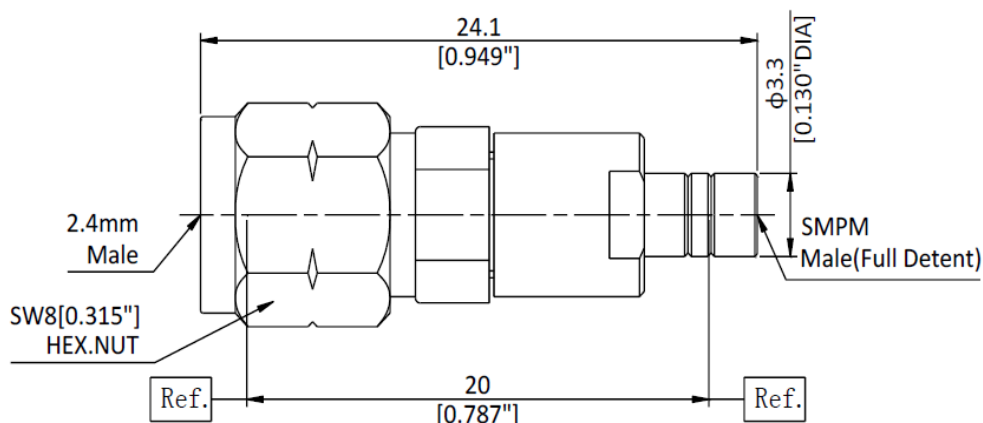

Test Report

