

Part No. WADP-29M29MR

40GHz 2.92mm(M)-2.92mm(M) R/A 50Ω Adapter/Stainless Steel



Features:

- High repeatability
- Low VSWR



Electrical Specification

Frequency	DC-40GHz
Impedance	50 Ohm
V.S.W.R	1.25:1 Max
Connector Type	2.92mm Male– 2.92mm Male R/A

Mechanical Specification

Durability	500Cycles
------------	-----------

Material Specification


Housing	SU303 Polished & Passivated
Center Contact	Beryllium Copper Plated Gold
Insulator	PEI

Environmental Specification

Operating Temperature	-55~+165℃
-----------------------	-----------

Outline

Unit:mm(inch)

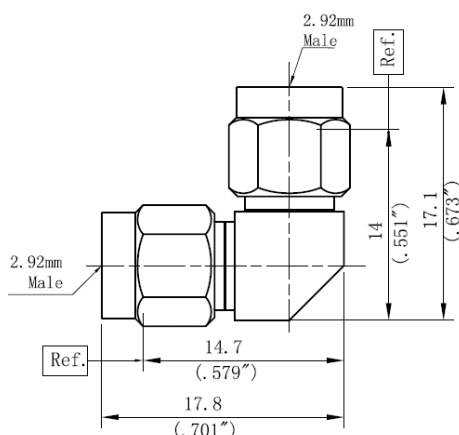

Test Report

