

Part No. WADP-SFSPF-03

26.5GHz SMA(F)-SMP(F) 50Ω Adapter

Features:

- High repeatability
- Low VSWR



Electrical Specification	
Frequency	DC-26.5GHz
Impedance	50 Ohm
V.S.W.R	1.25:1 Max.
Connector Type	SMA Female – SMP Female


Mechanical Specification	
Durability	500 Cycles

Material Specification	
SMA Body	Type 303 Stainless Steel- Passivated
SMP Body	Gold Plated Beryllium Copper
Center Contact	Gold Plated Beryllium Copper
Insulator	PEI & PTFE

Environmental Specification	
Operating Temperature	-40~+125°C

Outline

Unit:mm

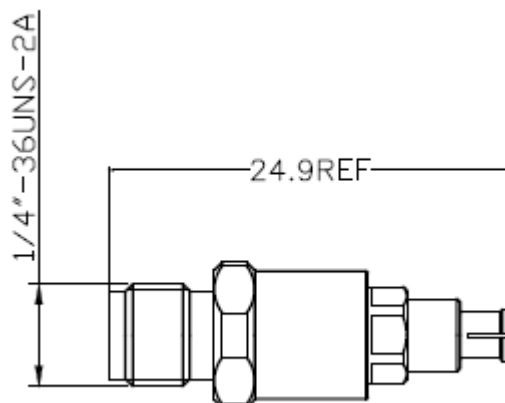

Test Curve

