

Part No. WATT-0.550-70FWR15-30

50-75GHz 0.5W WR15(UG-385/U) Waveguide Fixed Attenuator



Features:


- Smallest models made
- Low VSWR
- Low Insertion Loss



Electrical Specification				
Frequency	50-75GHz			
Attenuation Availability	3,6,10,20,30 dB			
Attenuation Accuracy	3dB	$\pm 0.5\text{dB}$	6dB	$\pm 0.8\text{dB}$
	10dB	$\pm 1.5\text{dB}$	20dB	$\pm 2.0\text{dB}$
	30dB	$\pm 2.5\text{dB}$		
VSWR	1.15:1(Typ.) 1.2:1(Max.)			
Power Handling	0.50W(CW)			
Impedance	50 ohm			
Waveguide Flange	UG-385/U			
Waveguide Size	WR15			

Outline

Unit:mm

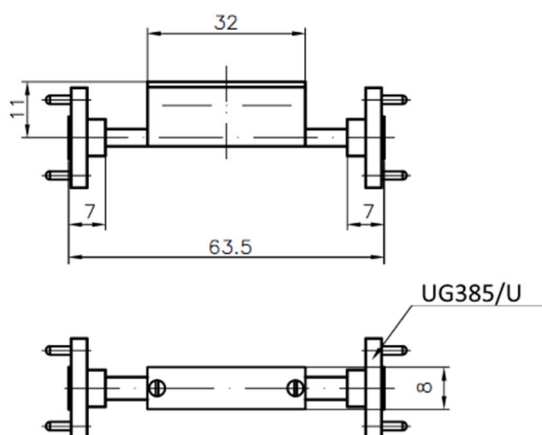

Test Curve

